
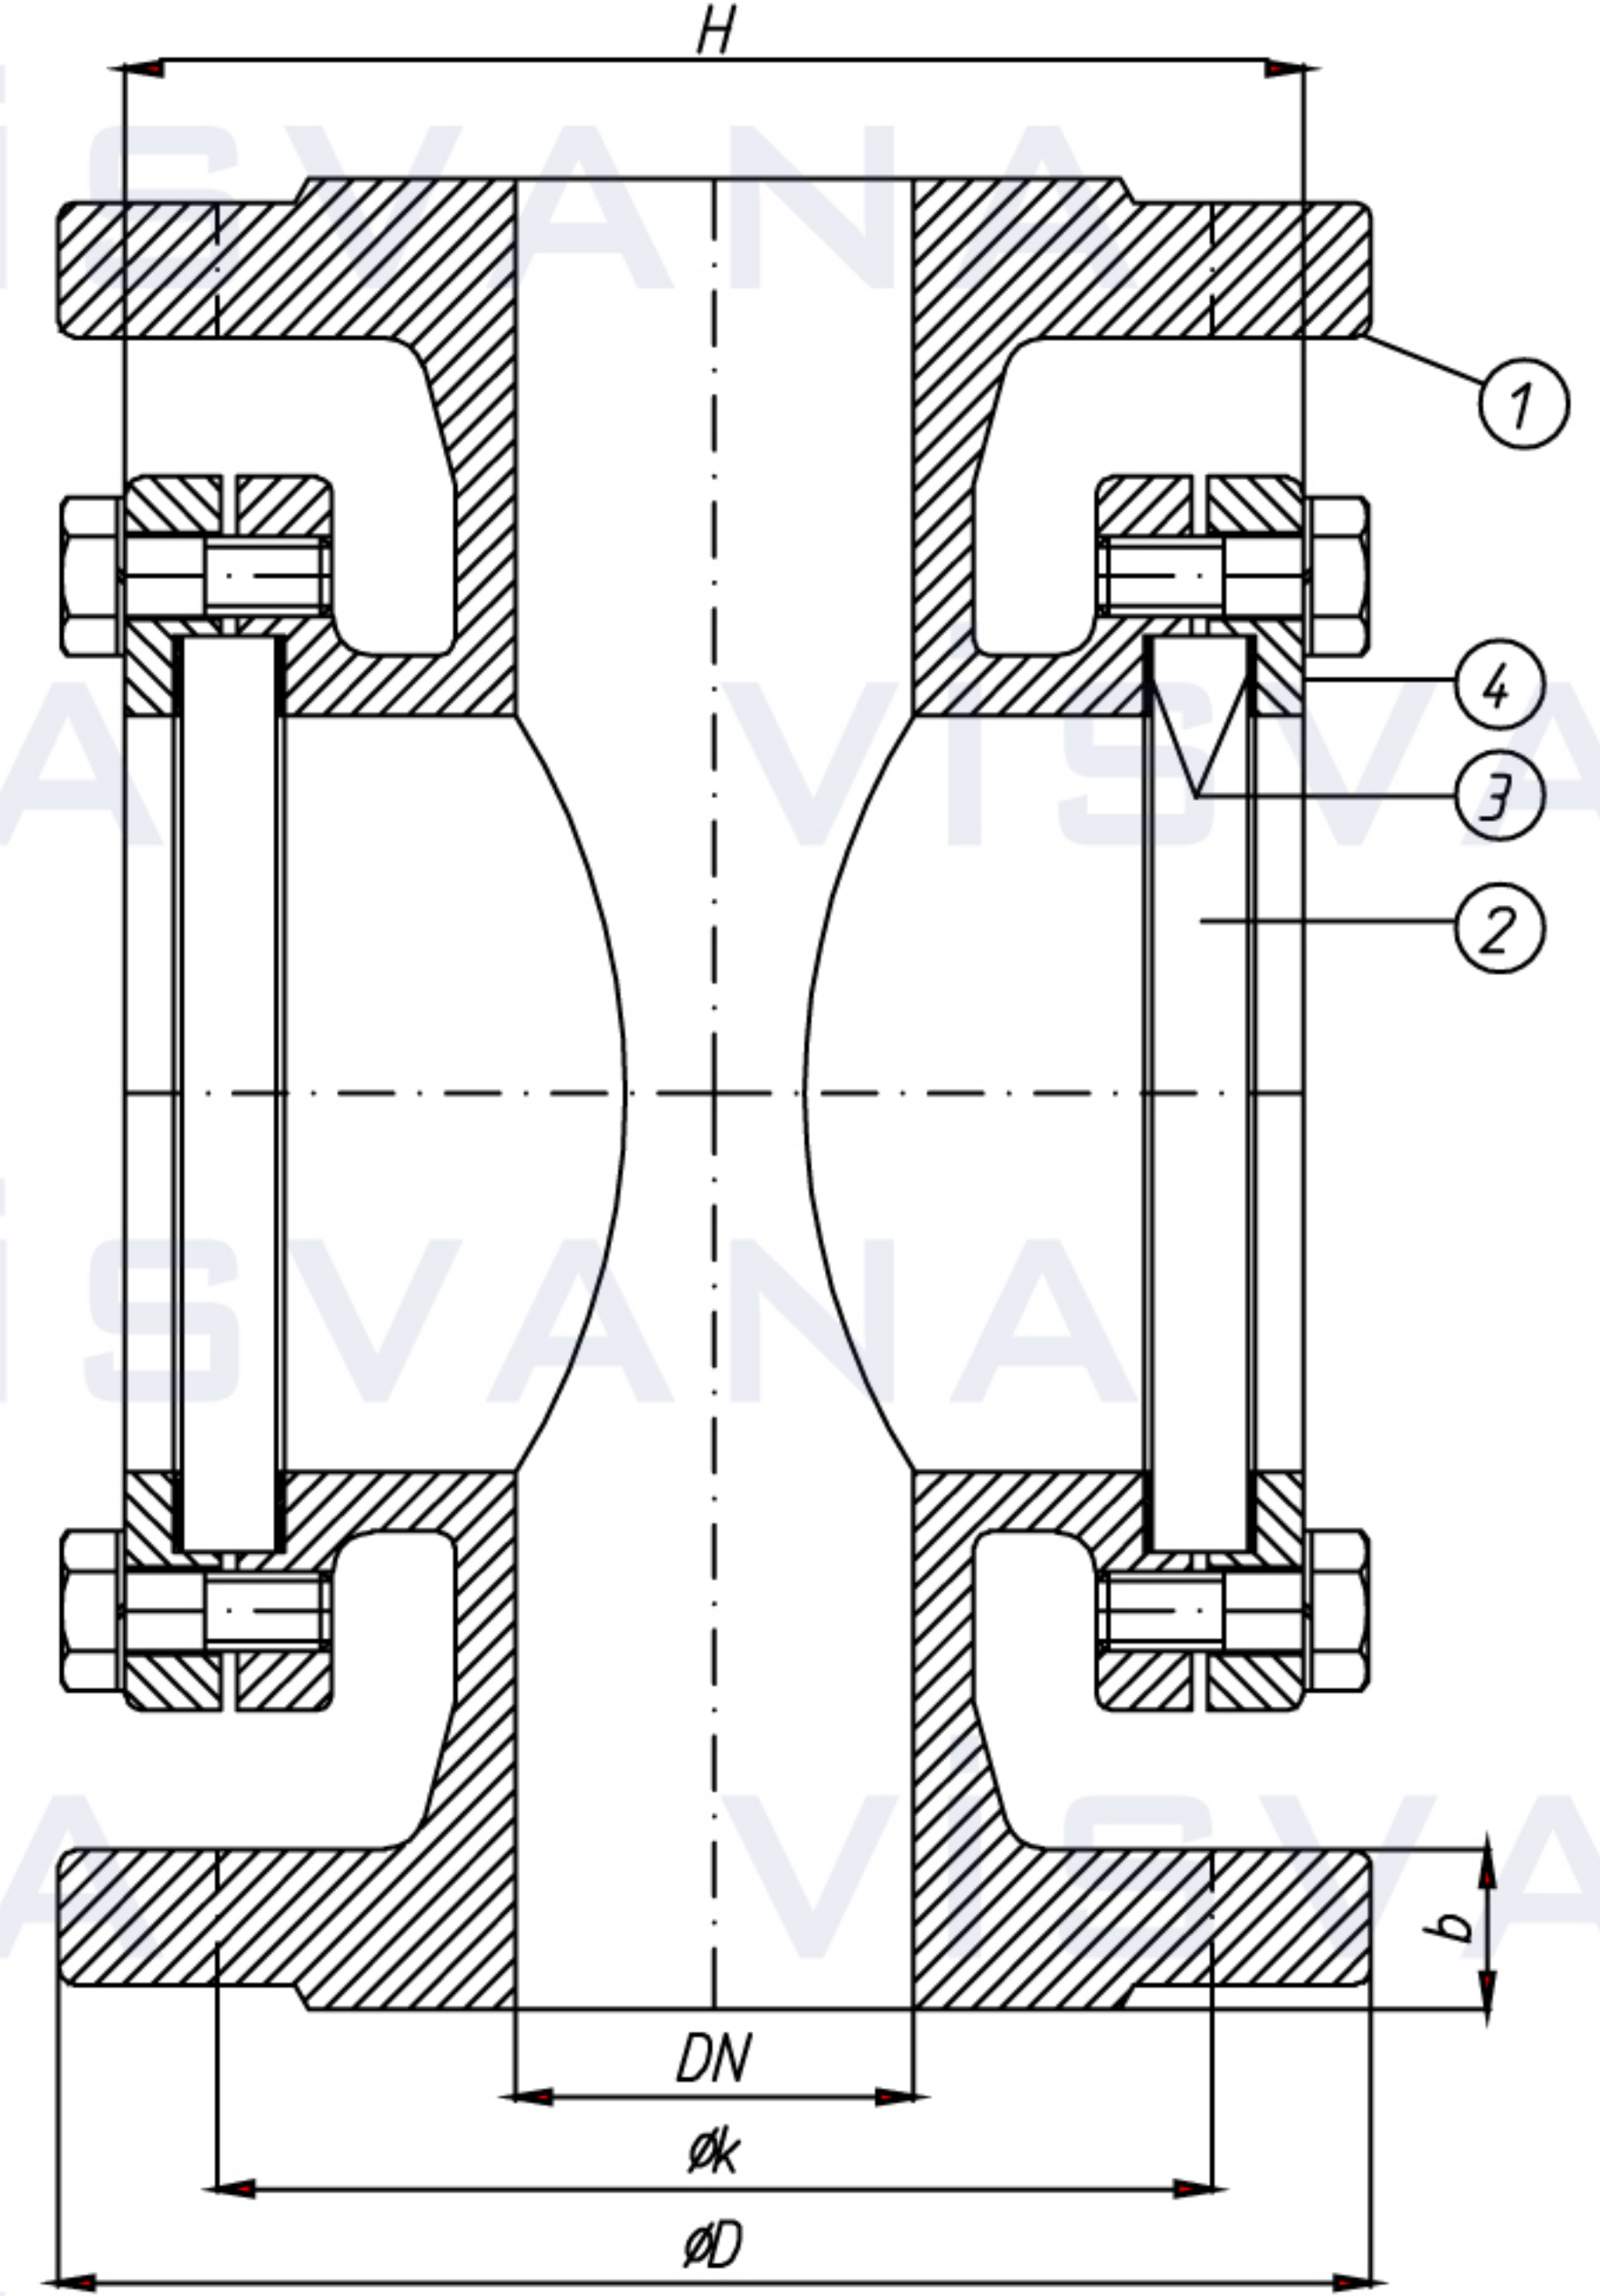


Pressure Rate / Basınç Aralığı: PN10-16-25-40

Flange Ends / Flanş: DIN EN 1092-1-2

DIN 3202/2-FT / DIN EN 558-1-1

DN 15-250

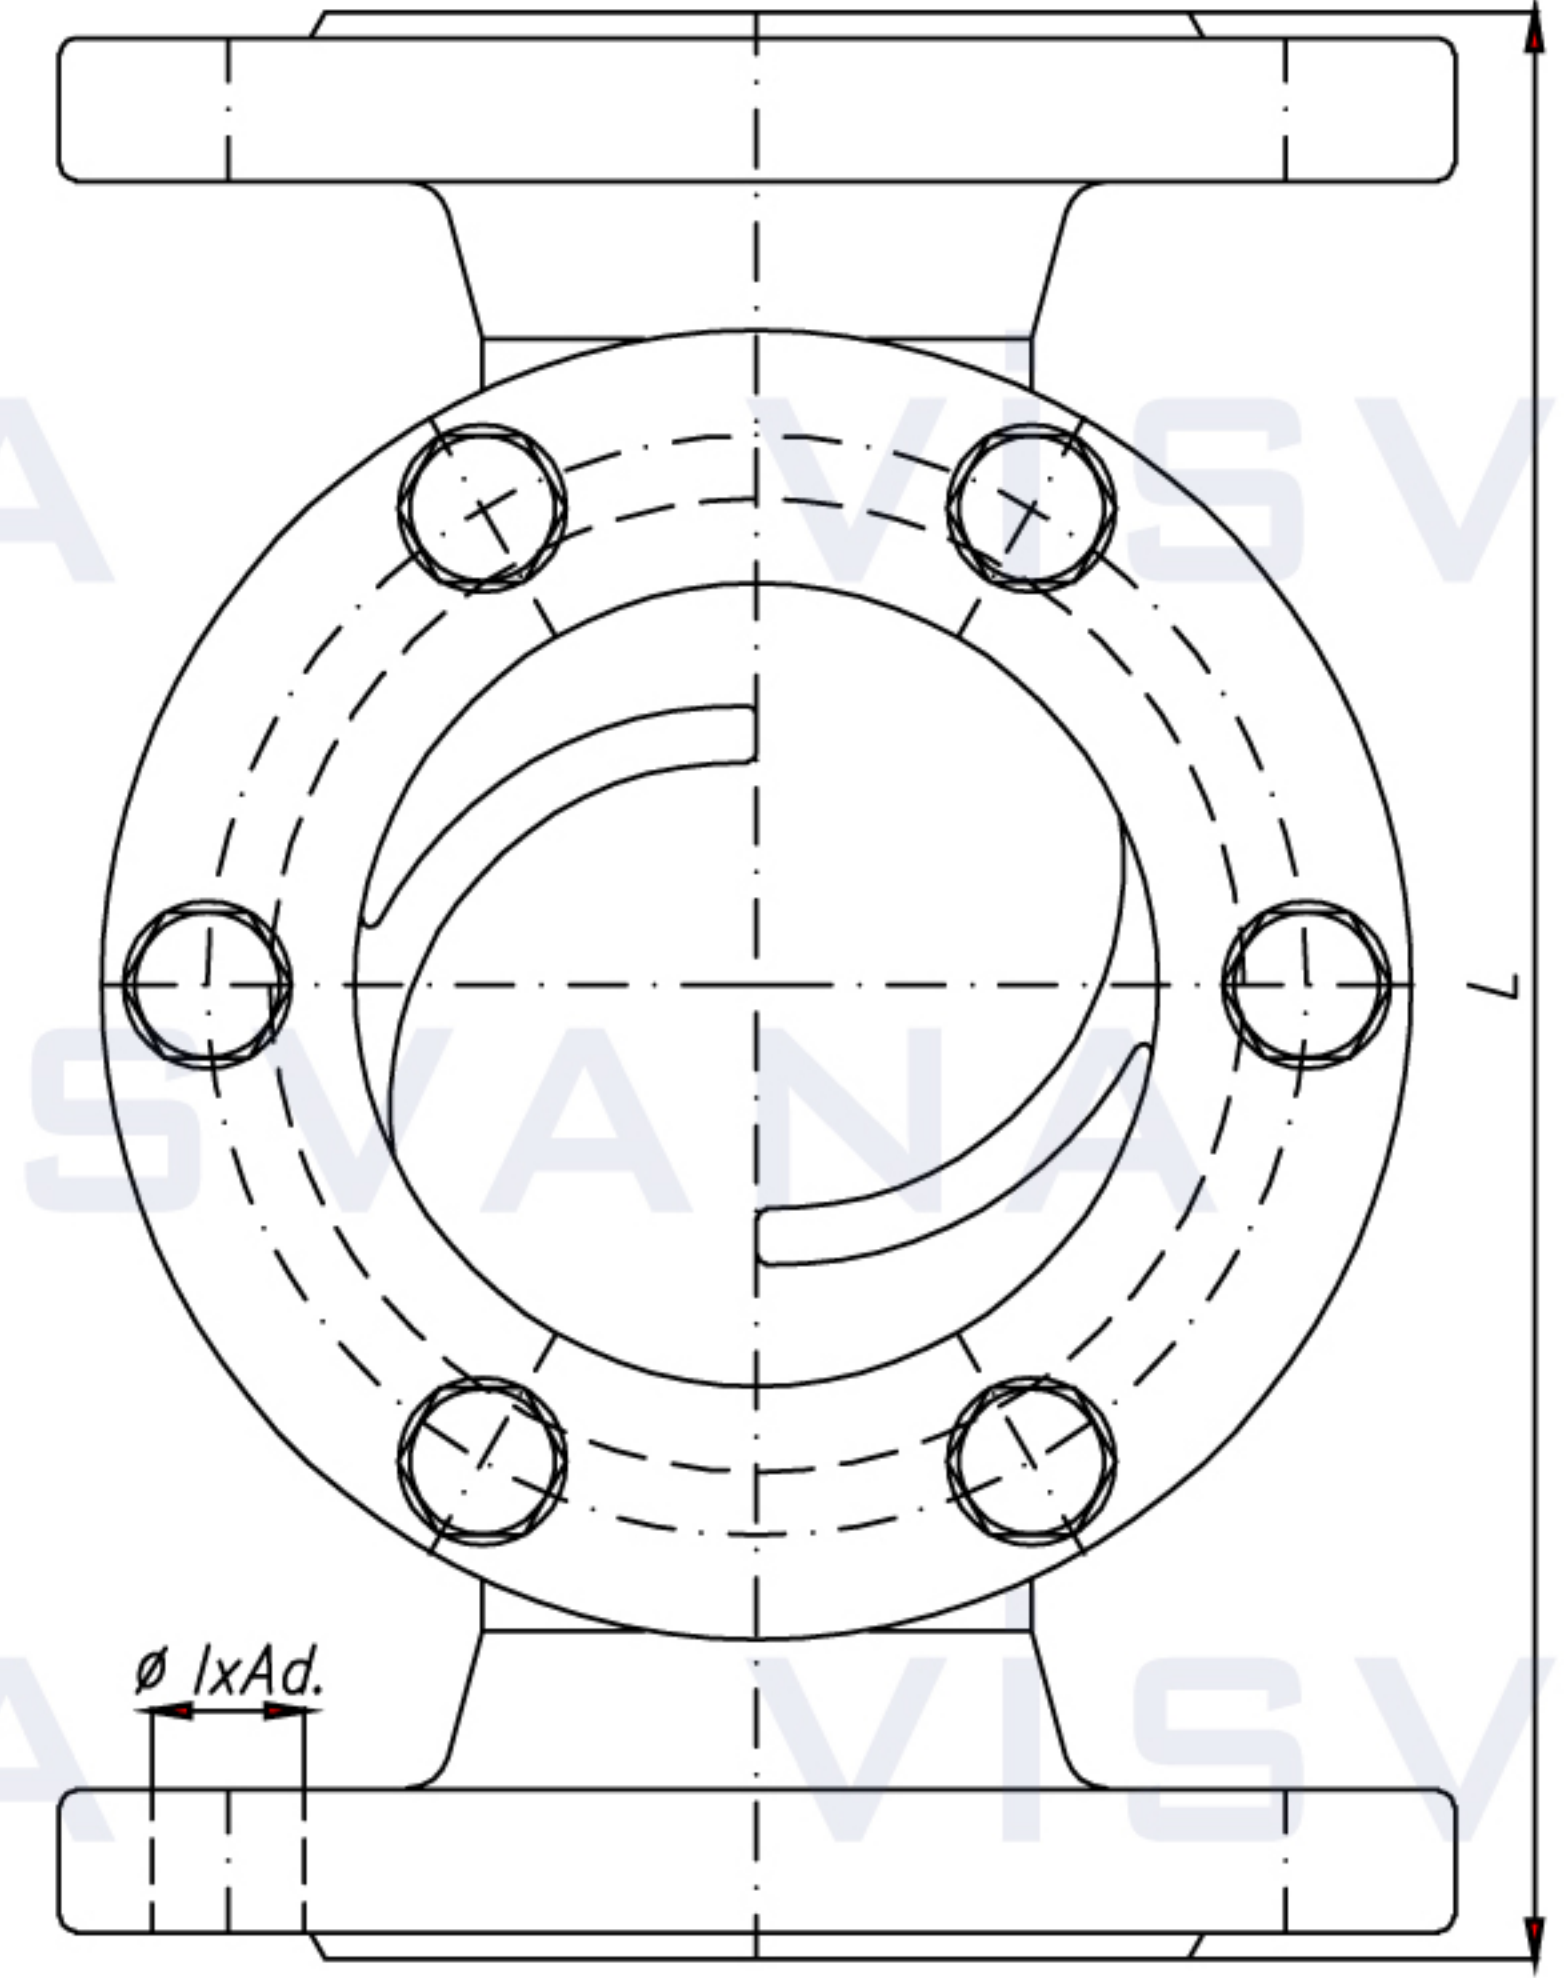

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG-40 / GS-C 25
2	Glass	Cam	Glass (Borosilicat DIN 7080)
3	Seal	Conta	Klingerit
4	Cover	Kapak	GG 25 / GGG-40 / GS-C 25

<i>Nominal Pressure</i> / Anma Basıncı		PN 10 - 16 - 25 - 40												
<i>Nominal Diameter</i> / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150	200	250
<i>Valve Dimensions</i> / Vana Boyutları DIN EN 558-1-1	L	130	150	160	180	200	230	290	310	350	400	480	600	730
	H	110	115	120	125	135	150	175	190	260	280	330	460	510
<i>Flange Dimensions</i> / Flanş Ölçüleri DIN EN 1092-1-2 PN 10	D	95	105	115	140	150	165	185	200	220	250	285	340	395
	k	65	75	85	100	110	125	145	160	180	210	240	295	350
<i>Flange Dimensions</i> / Flanş Ölçüleri DIN EN 1092-1-2 PN 16	D	95	105	115	140	150	165	185	200	220	250	285	340	405
	k	65	75	85	100	110	125	145	160	180	210	240	295	355
<i>Flange Dimensions</i> / Flanş Ölçüleri DIN EN 1092-1-2 PN 25	D	95	105	115	140	150	165	185	200	235	270	300	360	425
	k	65	75	85	100	110	125	145	160	190	220	250	310	370
<i>Flange Dimensions</i> / Flanş Ölçüleri DIN EN 1092-1-2 PN 25	D	95	105	115	140	150	165	185	200	235	270	300	375	450
	k	65	75	85	100	110	125	145	160	190	220	250	320	385
<i>Weight</i> / Ağırlık	kg	4,5	5,5	7,5	10	15	17	26	33	42	52	95	52	95