



VHPBV-C150

TRIPLE OFFSET BUTTERFLY VALVE

YÜKSEK PERFORMANSLI KELEBEK VANA

Design / Dizayn: API 609

Face to Face / L Boyu: API 609


P. Rate / B. Aralığı: PN 20 (150Lb) - PN 50 (300Lb)

Size Range / Ölçü Aralığı: DN 50(2") - DN 600 (24")

Temperature / Sıcaklık: -20o+420°C

Connection Ends / Bağlantı: Wafer, Lug, Flanged

Test: API 598

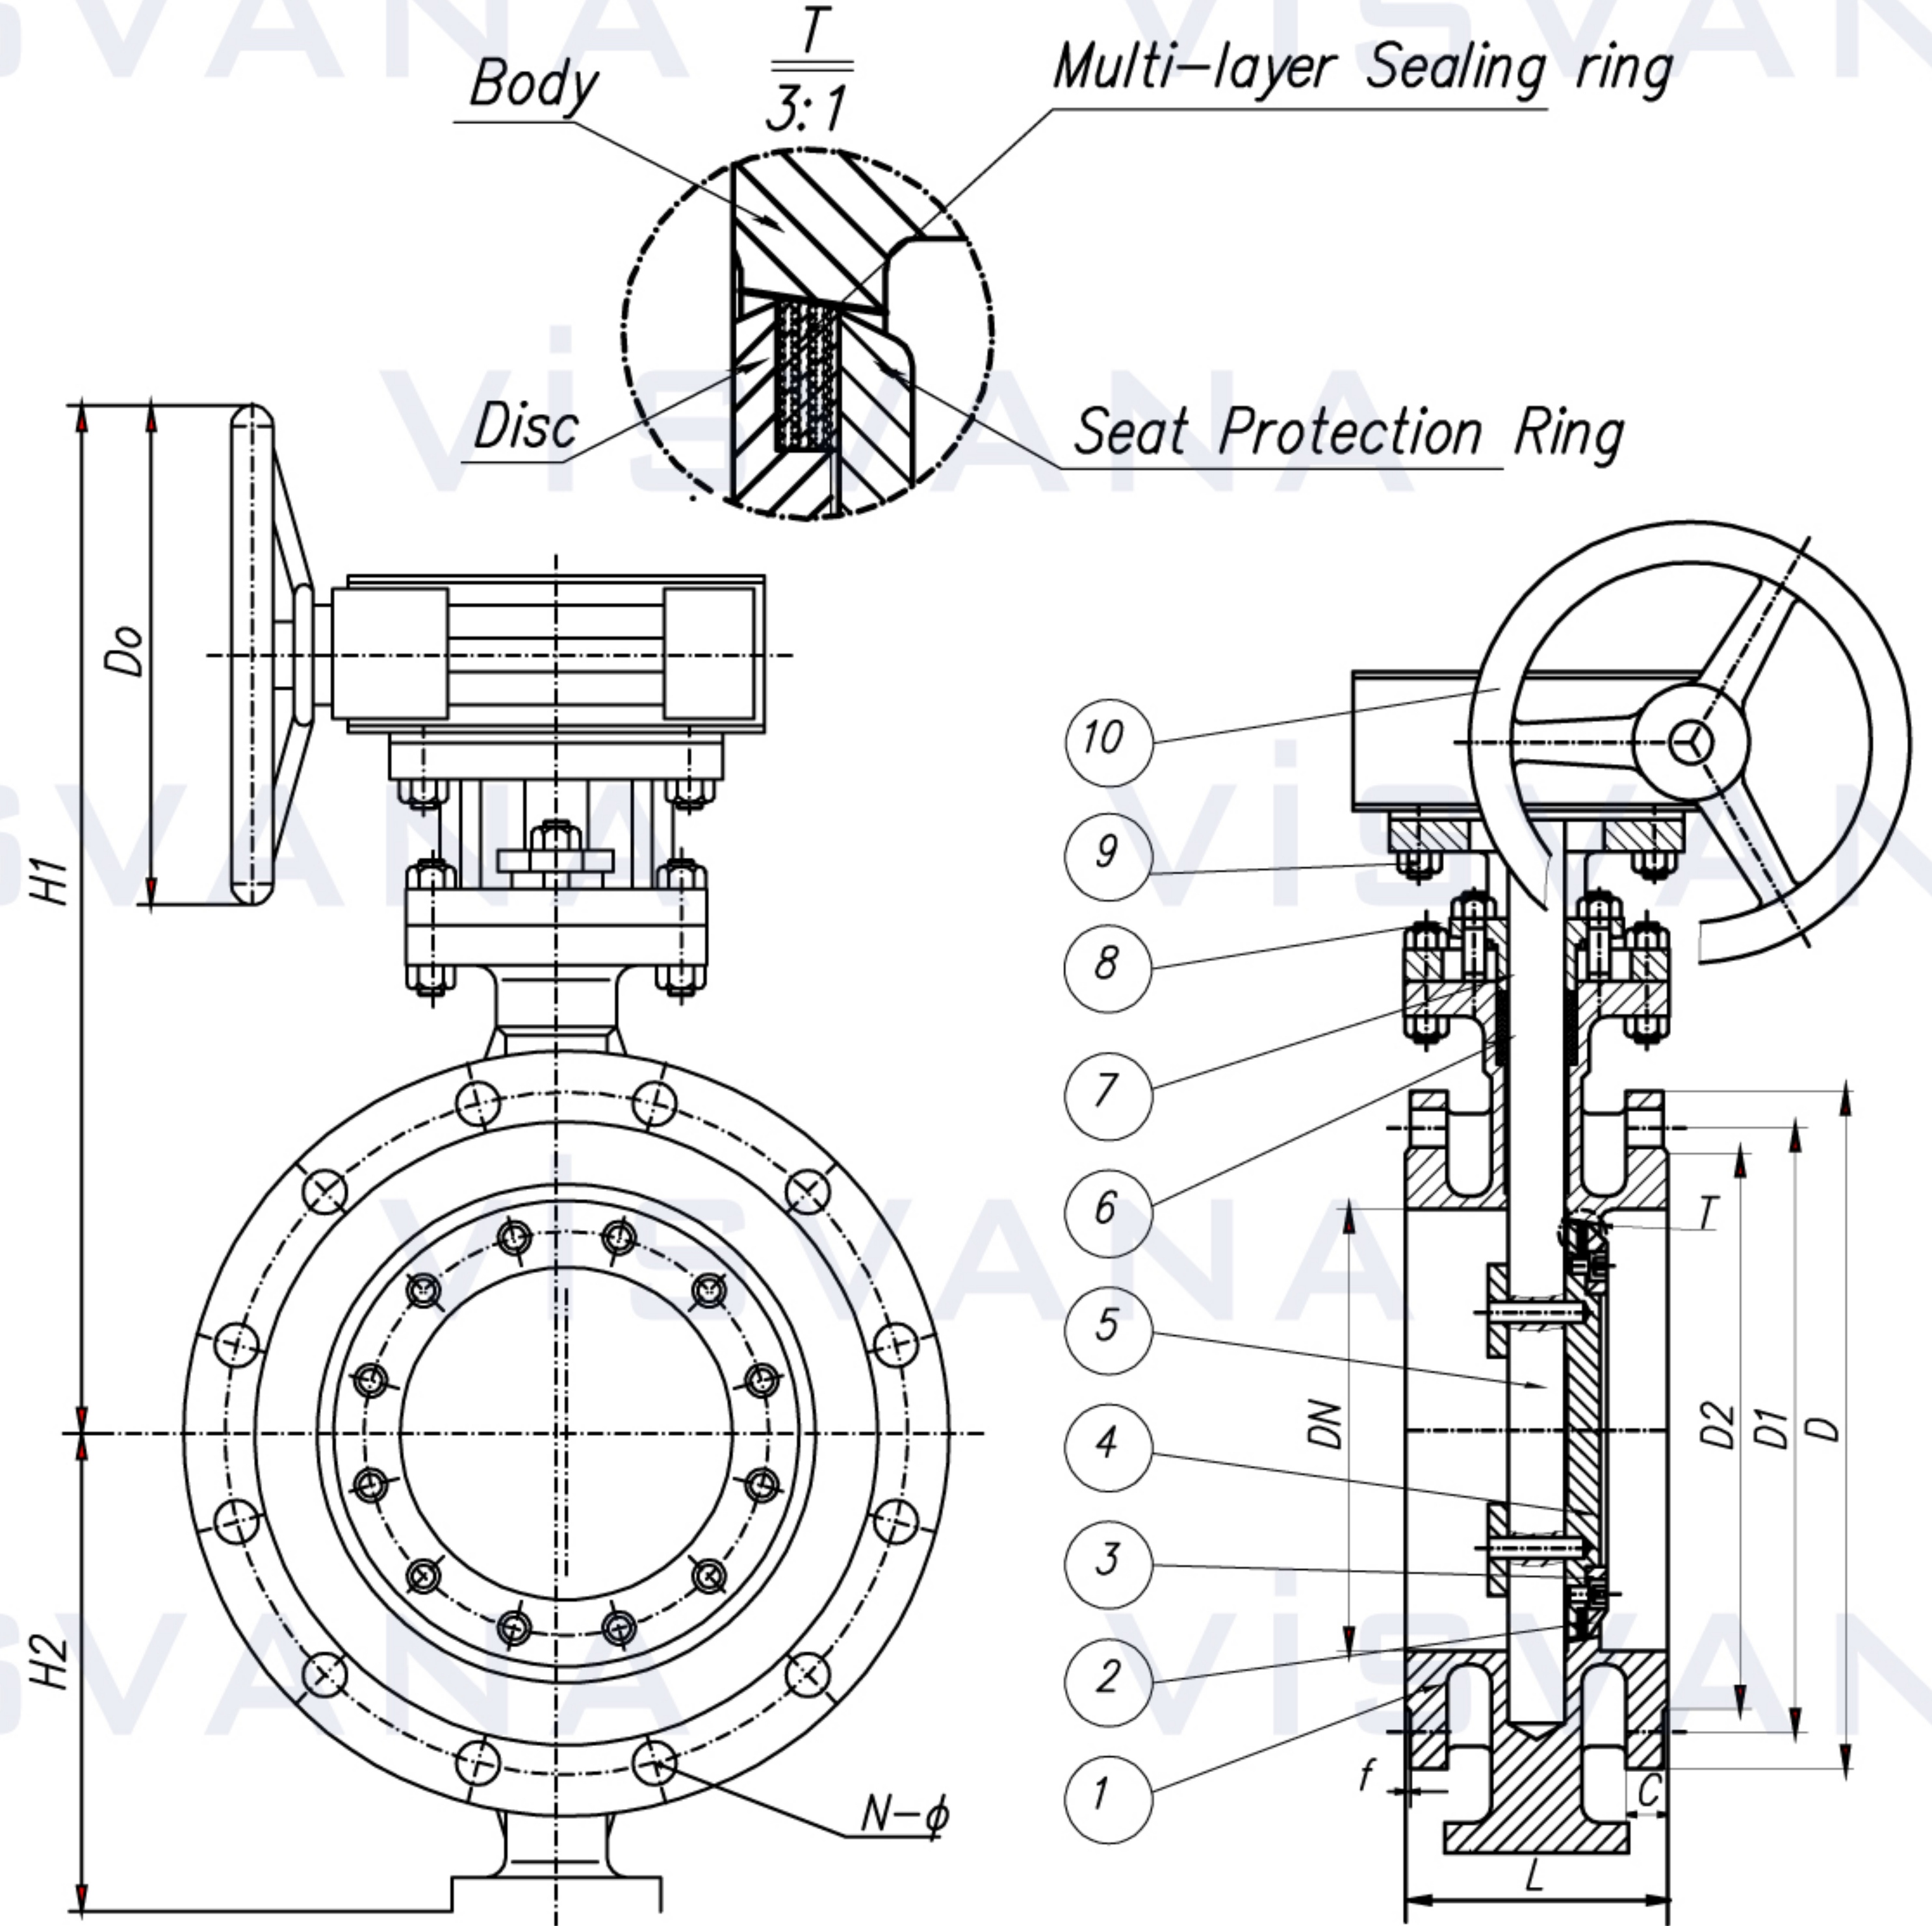

TESTING STANDART			PRODUCTION STANDART	
Design Pressure	150 LB		Design & Manufacture	API 609
Shell Test	3,1	MPa	Flange Connection	ANSI B16.5
Seall Test	2,2		Face To Face	ANSI B16.10
Suitable Temp.	-99°C / 500°C		Testing & Inspection	API 598
Suitable Medium	Oil / Gas / Water		Fire Safe	

NO	PART NAME	PARÇA ADI	MATERIAL/MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL/MALZEME
1	Body	Gövde	ASTM A216 WCB	6	Packing	Salmastra	Graphite
2	Multi-Layer S. Ring		SS304+ Graphite	7	Flange Gland		ASTM A216 WCB
3	Seat Protection Ring		ASTM SS 316	8	Bolt	Civata	ASTM A 193 B7
4	Disc	Klape	ASTM SS 316	9	Nut	Somun	ASTM A 194 2H
5	Stem	Mil	ASTM A 182 F6	10	Worm Gear		

<i>DIMENSIONS (mm)</i> ÖLÇÜLER (mm)	in	L	D	D1	D2	N-Ø	C	F	H1	H2	DO
150 Lb	2"	108	152	120,7	92	4-19	16,0	1,6	290	110	145
	3"	114	191	139,7	127		19,5		315	130	
	4"	127	229	152,4	157	8-19	24,0		360	170	290
	5"	140	254	190,5	186	8-22	24,0		470	185	
	6"	140	279	216,0	216		25,5		505	210	
	8"	152	343	241,3	270	12-25	29,0		570	240	340
	10"	165	406	298,5	324		30,5		610	285	
	12"	178	483	362,0	381		32,0		690	310	380
	14"	190	533	431,8	413	12-28	35,0		730	350	
	16"	216	597	476,3	470	16-28	37,0		770	375	
	18"	222	635	539,8	533	16-32	40,0		835	405	
	20"	229	699	635,0	584	20-32	43,0		925	455	
	24"	267	813	749,3	692	20-35	48,0		940	510	