
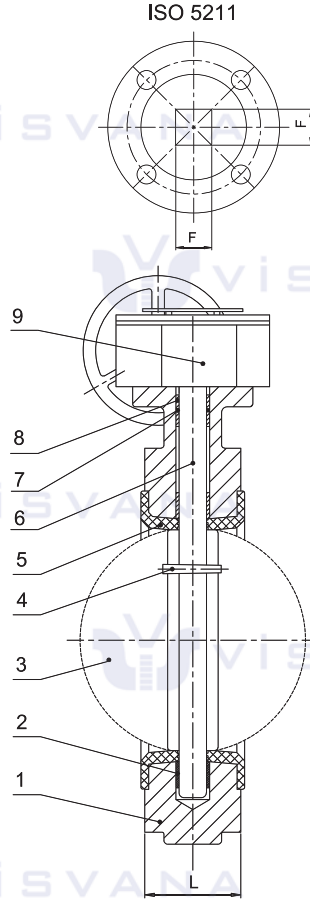


Design / Dizayn: JIS F7480 Series 122
Pressure Rate / Basınç Aralığı: 5K / 10K
Temperature / Sıcaklık: -10~80 °C
Size Range / Ölçü Aralığı: DN50-DN150
Flange Ends / Flanş: JIS B2210 - 5K / 10K
Inspection / Teftiş: JIS F7400
Application : Sea water, cold and warm water

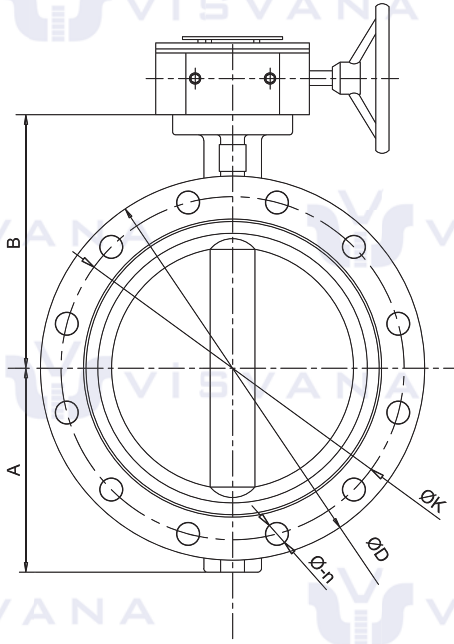

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GGG 40	6	Stem	Mil	SS 410
2	Bushing	Burç	Brass	7	O-Ring	O-Ring	NBR
3	Disc	Klape	Al-Bronze C95400	8	Bushing	Burç	Brass
4	Pin	Pim	2507	9	Gearbox	Dişli Kutusu	Assembly
5	Seat	Conta	NBR				

Dimensions / Ölçüler						JIS 5K			JIS 10K		
DN	L	A	B	F	ISO5211	D	K	Øxn	D	K	Øxn
100	60	124	150	11	F07	200	165	Ø19x8	210	175	Ø19x8
125	100	144	171	14	F07	235	200	Ø19x8	250	210	Ø23x8
150	100	154	184	14	F07	265	230	Ø19x8	280	240	Ø23x8
200	100	187	214	17	F10	320	280	Ø23x8	330	290	Ø23x12
250	110	217	265	22	F10	385	345	Ø23x12	400	355	Ø25x12
300	110	243	288	22	F10	430	390	Ø23x12	445	400	Ø25x16
350	120	268	322	22	F10	480	435	Ø25x12	490	445	Ø25x16
400	130	301	370	27	F14	540	495	Ø25x16	560	510	Ø27x16
450	150	330	393	36	F14	605	555	Ø25x16	620	565	Ø27x20
500	160	358	432	36	F14	655	605	Ø25x20	675	620	Ø27x20
600	170	419	501	46	F16	770	715	Ø27x20	795	730	Ø33x24