


Pressure Rate / Basınç Aralığı: PN 16-25-40

Size Range / Ölçü Aralığı: DN25-DN100

Connection End / Bağlantı: EN 10226-1

Dişli - Threaded

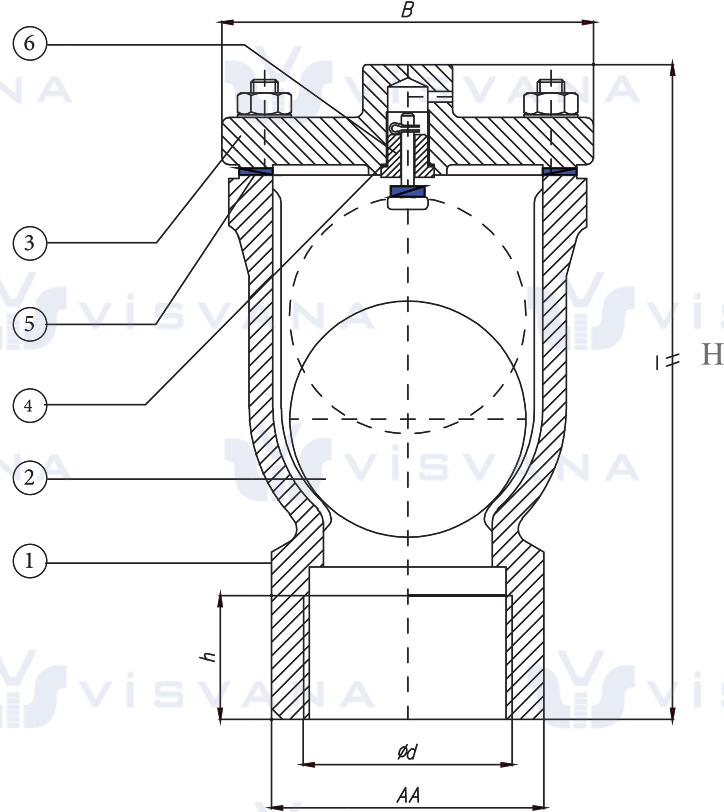

| NO | PART NAME | PARÇA ADI | MATERIAL / MALZEME       |
|----|-----------|-----------|--------------------------|
| 1  | Body      | Gövde     | GG 25 / GGG-40 / GS-C 25 |
| 2  | Ball      | Küre      | PVC / PTFE               |
| 3  | Cover     | Kapak     | GG 25 / GGG-40 / GS-C 25 |
| 4  | Seal      | Conta     | EPDM / NBR / TEFLON      |
| 5  | Gasket    | Conta     | EPDM / KLINGERIT         |
| 6  | Nozzle    | Sibob     | Ms 58 / Brass            |

|     |     |     | PN 16 / 25 / 40 |    |     |                      |
|-----|-----|-----|-----------------|----|-----|----------------------|
| DN  | B   | H   | Ød              | h  | AA  | Weight<br>Ağırlık Kg |
| 25  | 160 | 210 | R 1"            | 25 | 46  | 5                    |
| 40  | 160 | 220 | R 1 1/2"        | 35 | 60  | 6                    |
| 50  | 160 | 230 | R 2"            | 40 | 75  | 7                    |
| 80  | 250 | 290 | R 3"            | 40 | 105 | 13                   |
| 100 | 270 | 330 | R 4"            | 45 | 125 | 15                   |