


Design / Dizayn : DIN 3357-2, TS 3148/17
Pressure Rate / Basınç Aralığı : PN 10 -16 -25 -40
Size Range / Ölçü Aralığı: DN15 - DN150
Face to Face / L Boyu : EN 558 Serie 1,
DIN 3202 F1
Flange Ends / Flanş : EN 1092
Tests / Testler : EN 12266 & API 598

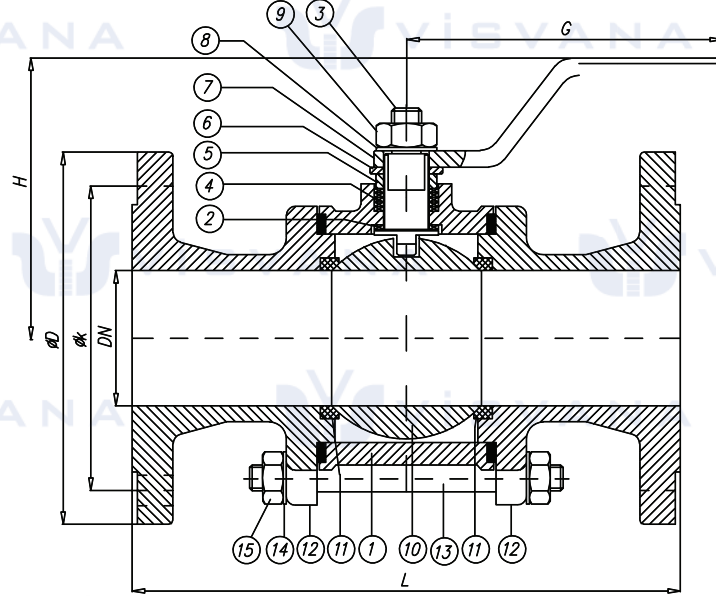

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	AISI 304 / AISI 316	9	Nut	Somun	5 D/SS
2	Gasket	Alt Teflonu	PTFE	10	Ball	Küre	AISI 304 / AISI 316
3	Stem	Mil	AISI 304 / AISI 316	11	Seat	Küre Yatağı	PTFE
4	Gasket	Teflon Ring	PTFE	12	Flange	Yan Flanş	AISI 304 / AISI 316
5	Gland Bush	Baskı Burcu	AISI 304 / AISI 316	13	Stud	Saplama	St / SS
6	Stopper	Hareket Pulu	AISI 304 / AISI 316	14	Washer	Rondela	St / SS
7	Lever	Kol	AISI 304 / AISI 316	15	Nut	Somun	5 D/SS
8	Washer	Rondela	AISI 304 / AISI 316				

Nominal Diameter / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150
Valve Dimensions / Vana Boyutları DIN EN 558-1-1/15 DIN 3357-2 TS 3148/17	L	130	150	160	180	200	230	290	310	350	400	480
	G max.	160	180	180	250	300	320	350	450	500	700	700
	H max.	95	110	115	130	135	145	155	195	220	265	300
Flange Dimensions / Flanş Ölçüleri DIN EN 1092-1-2 PN 10-16	D	95	105	115	140	150	165	185	200	220	250	285
	k	65	75	85	100	110	125	145	160	180	210	240
Flange Dimensions / Flanş Ölçüleri DIN EN 1092-1-2 PN 25	D	95	105	115	140	150	165	185	200	235	270	300
	k	65	75	85	100	110	125	145	160	190	220	250
Flange Dimensions / Flanş Ölçüleri DIN EN 1092-1-2 PN 40	D	95	105	115	140	150	165	185	200	235	270	300
	k	65	75	85	100	110	125	145	160	190	220	250
Weight / Ağırlık (~ for SS)	kg	2,3	3,8	4	6,5	8,55	13,55	20,15	29,5	40,3	68	86