


Design / Dizayn : DIN 3259

Pressure Rate / Basınç Aralığı : PN 10 -16

Size Range / Ölçü Aralığı: DN50 - DN600

Flange Ends / Flanş : EN 1092-2/B

Tests / Testler : EN 12266

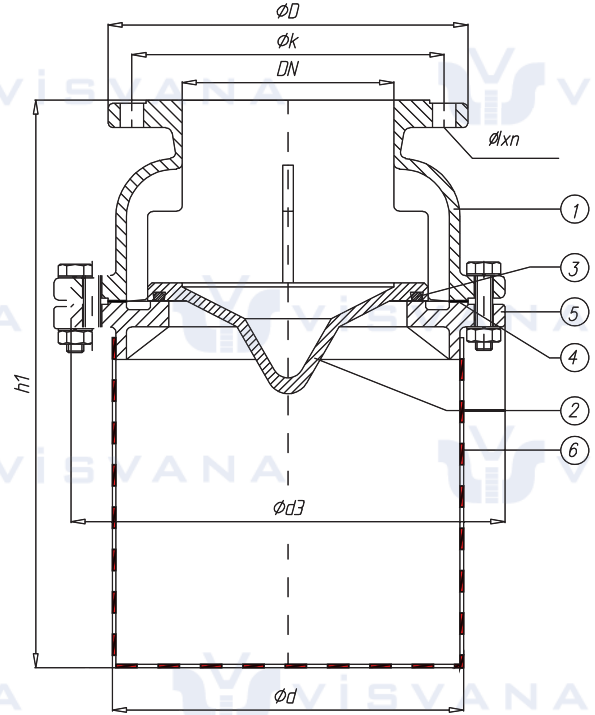

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG-40.3/GS-C 25
2	Disc	Klape	GG 25 / GGG-40.3/GS-C 25/Bronze/SS
3	O-Ring	O-Ring	NBR/EPDM
4	Gasket	Conta	NBR/EPDM
5	Flange	Flanş	GG 25 / GGG-40.3/GS-C 25
6	Basket	Filtre	AISI 304/St-37(Gal. Zn)

Nominal Pressure / Anma Basıncı	PN	10 / 16												
Nominal Diameter / Anma Çapı	DN	50	65	80	100	125	150	200	250	300	350	400	500	600
Valve Dimensions / Vana Boyutları DIN 3259	Ød3	180	190	210	240	280	335	365	405	505	555	675	775	875
	Ød	77	92	127	142	188	217	282	325	420	470	520	620	520
	h1	175	215	265	315	335	410	470	500	600	750	800	950	1250
Flange Dimensions DIN EN 1092 PN 10	D	165	185	200	220	250	285	340	395	445	505	565	670	780
	k	125	145	160	180	210	240	295	350	400	460	515	620	725
	Øxn	Ø18x4		Ø18x8		Ø22x8		Ø22x12		Ø22x16	Ø26x16	Ø26x20	Ø30x20	
Flange Dimensions DIN EN 1092 PN 16	D	165	185	200	220	250	285	340	395	445	505	565	715	840
	k	125	145	160	180	210	240	295	350	400	460	515	650	770
	Øxn	Ø18x4		Ø18x8		Ø22x8	Ø22x12	Ø26x12		Ø26x16	Ø30x16	Ø33x20	Ø36x20	
Weight / Ağırlık (~ for iron)	kg	7	9	12	19	23	40	65	95	170	230	300	450	655