


**BRONZE SDNR STOP VALVE
STRAIGHT TYPE
(SCREW BONNET, SHORT TYPE)
KISA TİP KUMANDALI ÇEKVALF**

VSSS-16 

Pressure Rate / Basınç Aralığı: PN16-PN10
Size Range / Ölçü Aralığı: DN15-DN100
Flange Ends / Flanş: DIN EN 1092
Test: DIN EN 12266

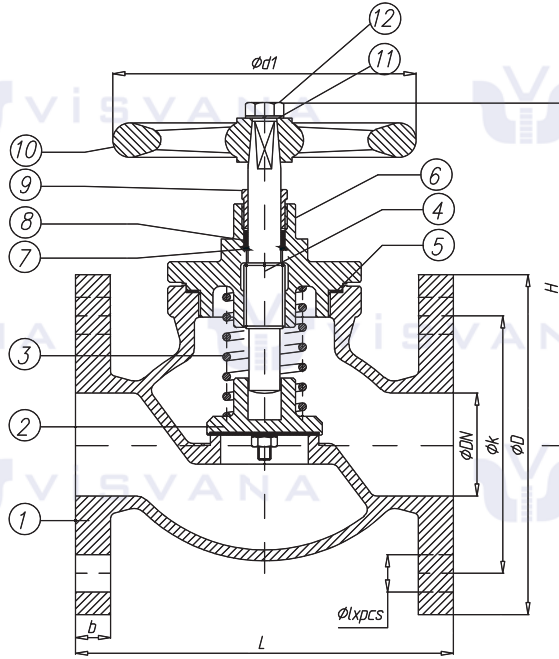

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	G-CuSn5Zn5Pb5-C	7	Washer	Rondela	CuZn39Pb3 / PTFE
2	Disc	Klape	G-CuSn5Zn5Pb5-C	8	Packing	Salmastra	Graphite / PTFE
3	Spring	Yay	SS Spring Steel	9	Gland	Salmastra Baskısı	CuZn39Pb3
4	Stem		CuZn39Pb3 / CuSn8	10	Handwheel	El Çarkı	GG-25
5	Gasket	Conta	Perbunan / PTFE	11	Washer	Rondela	Steel 5 Zn
6	Bonnet	Kapak	G-CuSn5Zn5Pb5-C	12	Bolt	Küre	Steel 5 Zn

Nominal Diameter Anma Çapı	PN 16 Flange Dimensions / Flanş Ölçüleri DIN EN 1092				Valve Dimensions / Vana Boyutları			Weight / Ağırlık Kg
	DN	ØD	Øk	Ø1xad	b	L	Ød1	H
15	95	65	Ø14x4	12	70	63	95	1,6
20	105	75				80	110	2,2
25	115	85				90	115	2,6
32	140	100	Ø18x4	14	105	90	135	4,4
40	150	110			120	100	145	6,6
50	165	125			140	125	165	8,1
65	185	145	Ø18x8	16	180	160	230	11,5
80	200	160			200	200	250	16,2
100	220	180			220	200	260	21,5