

Pressure Rate / Basınç Aralığı : PN 10 -16 - 25

Size Range / Ölçü Aralığı: DN40 - DN1000



Temperature / Sıcaklık : -10....+120 °C

Face to Face / L Boyu : EN 558 Serie 16,

DIN 3202-K3

Flange Ends / Flanş : EN 1092-2/B

Tests / Testler : EN 12266 & API 598

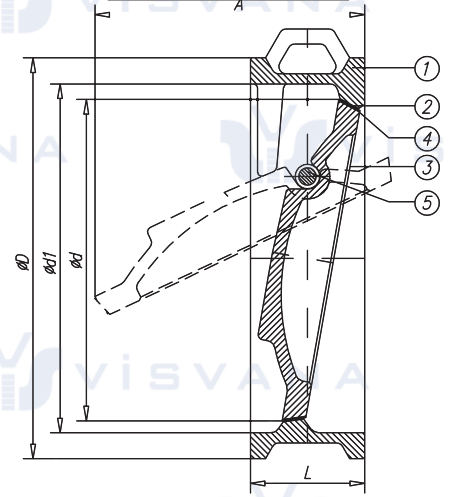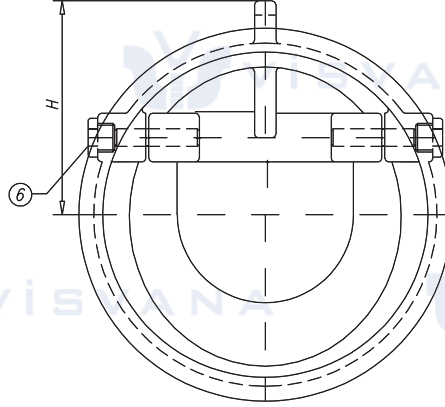

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GS-C 25/AISI 304/316 / Bronze
2	Body Seat	Gövde Siti	Welded 13 Cr, Stellite 6 or 21
3	Disc	Klape	AISI 304 -316 / Bronze / Cast Steel
4	Disc Seat	Klape Siti	Welded 13 Cr, Stellite 6 or 21
5	Stem	Mil	AISI 304 -316
6	Plug	Tapa	AISI 304 -316

Nominal Diameter Anma Çapı DN	ØD						Nominal Pressure / Anma Basıncı		
	Ød	Ød1	ØA	H	L		PN 10	PN 16	PN 25
40	34	40	45		33		94		94
50	44	50	54		43		109		109
65	58	65	64		46		129		129
80	72	80	85		64		144		144
100	90	100	95		64		164		164
125	112	125	115		70		194		194
150	135	150	135		76		220		220
200	180	200	220	155	89		275		284
250	225	250	220	182	114		330	330	343
300	270	300	250	210	114		380	386	403
350	315	350	295	240	127		440	446	460
400	365	400	340	275	140		491	498	515
450	410	450	370	300	152		541	558	565
500	460	500	405	325	152		596	620	625
600	555	600	500	390	178		698	735	732
700	650	700	616	460	229		808	808	834
800	745	800	670	515	241		915	915	942
900	835	900	750	562	241		1018	1112	1042
1000	930	1000	760	625	300		1125	1130	1155