

Design / Dizayn : DIN 3356

Face to Face / L Boyu : EN 558 Serie 8,




DIN 3202 F32

Pressure / Basınç : PN 10 -16

Size Range / Ölçü Aralığı : DN40 - DN600

Flange Ends / Flanş : EN 1092-2/B

Tests / Testler : EN 12266

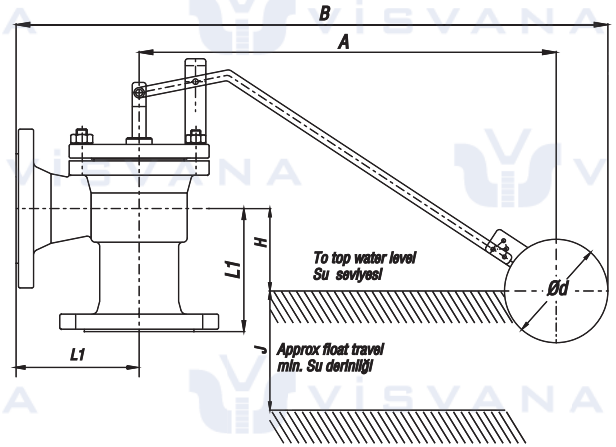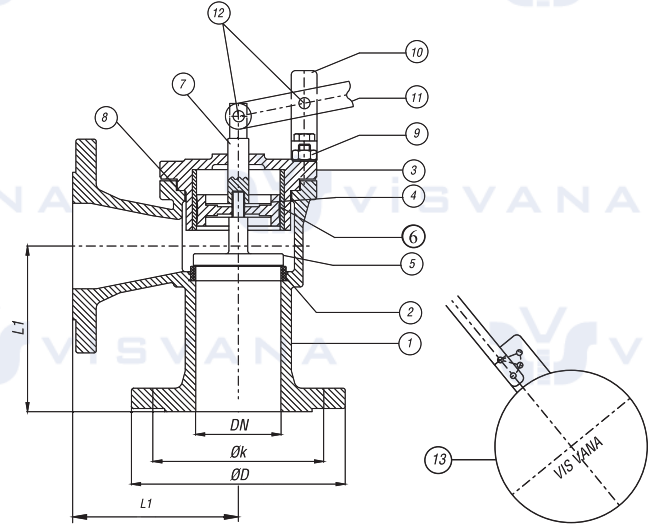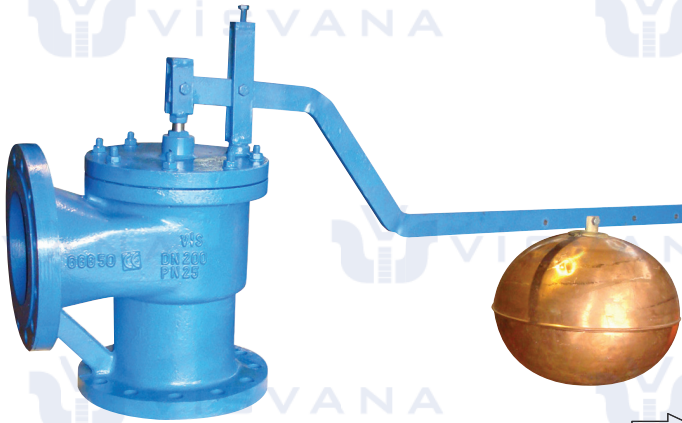

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG-40	8	Seal	Conta	EPDM
2	Seat Ring	Burç	Ms 58 / 1,4021	9	Bolt	Civata	8,8
3	Bonnet	Kapak	GG 25 / GGG-40	10	Fulcrum	Destek	GG 25 / GGG-40
4	Seat	Burç	Ms 58 / 1,4021	11	Lever	Kol	St 37
5	Disk	Klape	Ms 58 / 1,4021	12	Pin	Pim	1,4021
6	Cup Washer	Keçe	St 37 / NBR	13	Float	Küre	Bronze / St 37 / SS420 / SS 304
7	Spindle	Mil	1,4021				

Nominal Pressure / Anma Basıncı Nominal Diameter / Anma Çapı	PN 10 / 16										
	DN	40	50	65	80	100	125	150	200	250	300
Valve Dimensions / Vana Boyutları DIN 3356 DIN 3202-F32	L1	115	125	145	155	175	200	225	275	325	375
	A	1295		1460		1535		1850		2145	
	B	1555		1740		1855		2260		2675	
	H	172		305		330		340		455	
	J	450		546		700		920		1230	
Flange Dimensions / Flanş Ölçüleri DIN 2501 / DIN EN 1092-2 PN10	Ød	280		320		350		400		500	
	D	150	165	185	200	220	250	285	340	395	445
Flange Dimensions / Flanş Ölçüleri DIN 2501 / DIN EN 1092-2 PN16	k	110	125	145	160	180	210	240	295	350	400
	D	150	165	185	200	220	250	285	340	405	460
Weight / Ağırlık (~ for iron)	k	110	125	145	160	180	210	240	295	355	410
	kg	19	20	30	35	55	70	100	180	270	370