


ANGLE TYPE MUD BOX KÖŞE TİP ÇAMUR KUTUSU

VCVA-10



Pressure Rate / Basınç Aralığı: PN 4
Size Range / Ölçü Aralığı: DN40-DN400
Flange Ends / Flanş: DIN EN 1092(PN10Flange)
Application: For pipelines for sea cooling water
Dimensions / Ölçüler: DIN 87 151-E Angle
DIN 87 151-D Straight
Test: DIN EN 12266

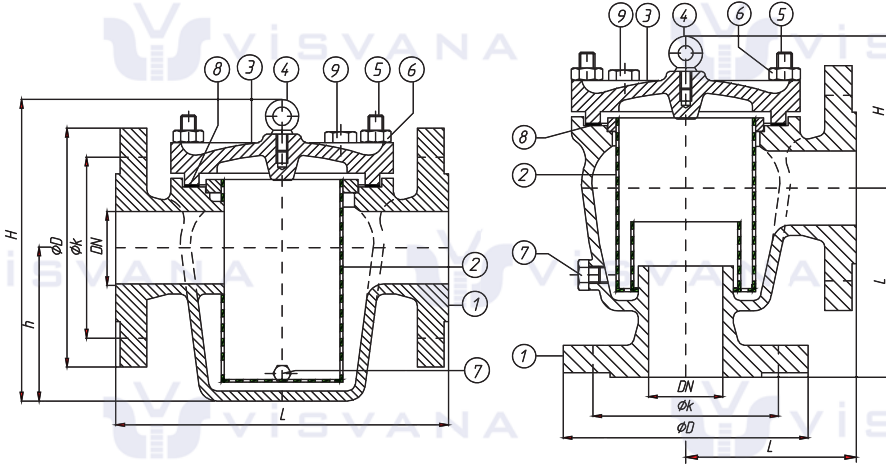

5

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG25/GGG40/GGG40.3/GSC25/Bronze R65, R67, RG10, CuSn10/SS304,SS316, Duplex 1.4470
2	Screen	Filtre	AISI 304L / AISI 316L / AISI 316Ti / CuNi10Fe
3	Bonnet	Kapak	GG25/GGG40/GGG40.3/GSC25/Bronze R65, R67, RG10, CuSn10/SS304,SS316, Duplex 1.4470
4	Ring Screw	Mapa	Galvanized Steel
5	Ring Stud	Saplama	Steel / A2 / A4
6	Nut	Somun	Steel / A2 / A4
7	Plug	Tapa	Bronze / AISI 304 / AISI 316
8	O-Ring/Gasket	O-Ring/Conta	EPDM / NBR

Nom. Diameter Anma Çapı	Capacity Water (v=1,5m/sec.)	
DN	l/min.	m³/h
40	113	6,8
50	177	10,6
65	298	17,9
80	495	29,7
100	708	42,4
125	1100	66,2
150	1590	95,4
175	2360	142
200	2830	169,6
250	4420	235,2
300	6365	382
350	8660	520
400	12350	740

Nom. Diameter Anma Çapı	STRAIGHT FORM / DÜZ TİP						Diameter Ağırlık
DN	ØD	Øk	L	H	h		kg
40	150	110	200	205	95		14
50	165	125	230	225	106		19
65	185	125	290	260	134		26
80	200	160	310	310	156		33
100	220	180	350	345	185		45
125	250	210	400	395	225		60
150	285	240	480	465	265		86
175	315	270	550	500	296		115
200	340	295	600	565	335		147
250	395	350	600	610	345		180
300	445	400	700	675	390		245
350	505	460	800	790	425		325
400	565	515	740	900	470		415

Nom. Diameter Anma Çapı	ANGLE FORM / AÇILI TİP					Diameter Ağırlık
DN	ØD	Øk	L	H		kg
40	150	110	125	240		15
50	165	125	135	260		21
65	185	125	150	280		25
80	200	160	175	330		36
100	220	180	195	350		51
125	250	210	220	415		69
150	285	240	270	470		94
175	315	270	300	505		120
200	340	295	300	540		138
250	395	350	390	660		200
300	445	400	450	760		278
350	505	460	400	730		330
400	565	515	420 ₅₂₀	980		458