

Pressure Rate / Basınç Aralığı: PN16-PN10

Size Range / Ölçü Aralığı: DN15-DN100


Flange Ends / Flanş: DIN EN 1092

Test: DIN EN 12266

Options / Opsiyon: Bronze RG7, RG10, CuSn10

BRONZE GLOBE VALVE STRAIGHT TYPE (SCREW BONNET, SHORT TYPE)

KISA TİP GLOB VANA

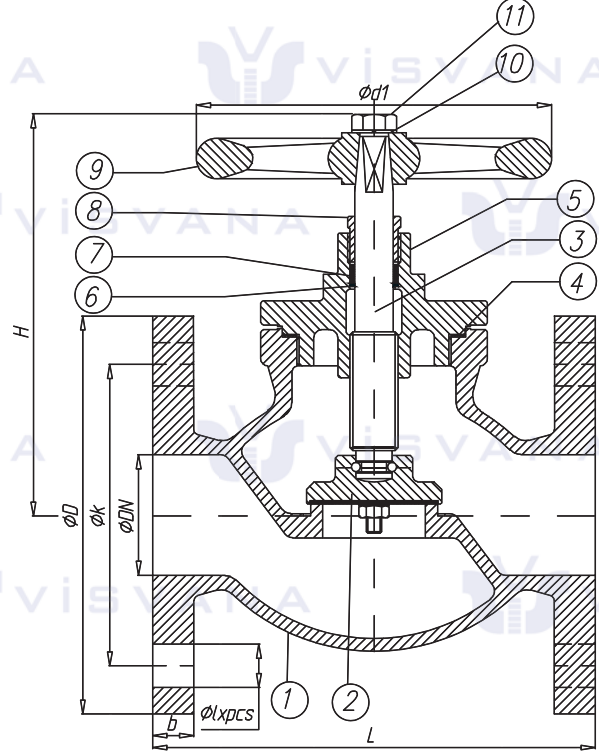

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	G-CuSn5Zn5Pb5-C	7	Packing	Salmastra	Graphite + PTFE
2	Disc	Klapa	G-CuSn5Zn5Pb5-C	8	Gland	Salmastra	CuZn39Pb3
3	Stem	Mil	CuZn39Pb3/CuSn8	9	Handwheel	Baskısı	GG 25
4	Gasket	Conta	Perbunan/PTFE	10	Washer	El Çarkı	Steel 5 Zn
5	Bonnet	Kapak	G-CuSn5Zn5Pb5-C	11	Bolt	Rondela	Steel 5 Zn
6	Washer	Rondela	CuZn39Pb3/PTFE			Civata	

Nominal Diameter Anma Çapı	PN 16 Flange Dimensions / Flanş Ölçüleri DIN EN 1092				Valve Dimensions / Vana Boyutları			Weight / Ağırlık Kg
	DN	ØD	Øk	Ø1xad	b	L	Ød1	
15	95	65	Ø14x4	12	70	63	95	1,6
20	105	75				80	110	2,2
25	115	85				90	115	2,6
32	140	100	Ø18x4	14	105	90	135	4,4
40	150	110				120	145	6,6
50	165	125				140	165	8,1
65	185	145				180	230	11,5
80	200	160	Ø18x8	18	200	200	250	16,2
100	220	180					260	21,5