



WAFER TILTING DISC CHECK VALVE

WAFER TİLTİNG DİSK ÇEK VALF

VWTD-10-16-25



Pressure Rate / Basınç Aralığı: PN10-16-25
Temperature / Sıcaklık: -10....+120 oC
Flange Ends / Flanş: DIN EN 1092,
DIN EN 12266 & API 598 Tests
DIN EN 558-1-16

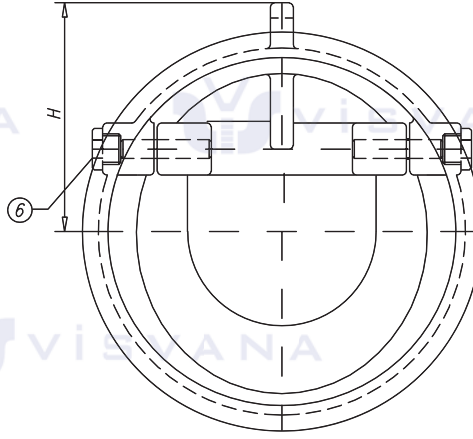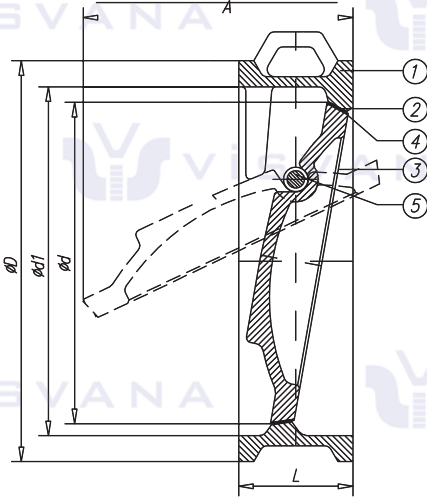

3

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GS-C 25 AISI 304 -316 / Bronze
2	Body Seat	Gövde Siti	Welded 13 Cr, Stellite 6 or 21
3	Disc	Klape	AISI 304 -316 / Bronze / Cast Steel
4	Disc Seat	Klape Siti	Welded 13 Cr, Stellite 6 or 21
5	Trim	Mil	AISI 304 -316
6	Plug	Tapa	AISI 304 -316

Nominal Diameter Anma Çapı DN	ØD						Diameter Ağırlık kg
	Ød	Ød1	ØA	H	L	Nominal Pressure / Anma Basıncı PN 10 PN 16 PN 25	
40	34	40	45		33	94 94	0,8
50	44	50	54		43	109 109	1
65	58	65	64		46	129 129	2
80	72	80	85		64	144 144	3
100	90	100	95		64	164 164	4,5
125	112	125	115		70	194 194	6,5
150	135	150	135		76	220 220	7,5
200	180	200	220	155	89	275 284	15
250	225	250	220	182	114	330 330 343	26,5
300	270	300	250	210	114	380 386 403	33,5
350	315	350	295	240	127	440 446 460	54
400	365	400	340	275	140	491 498 515	66
450	410	450	370	300	152	541 558 565	92
500	460	500	405	325	152	596 620 625	110
600	555	600	500	390	178	698 735 732	178
700	650	700	616	460	229	808 808 834	245
800	745	800	670	515	241	915 915 942	385
900	835	900	750	562	241	1018 1112 1042	445
1000	930	1000	760	625	300	1125 1130 1155	780