

Design / Dizayn : DIN 3356

Face to Face / L Boyu : EN 558 Serie 1,
DIN 3202 F1


Pressure / Basınç : PN 10 - 16 - 25 - 40

Size Range / Ölçü Aralığı : DN15 - DN600

Flange Ends / Flanş : EN 1092-2/B

Options / Opsiyon : Regulating Disc, ANSI Flange

Tests / Testler : EN 12266

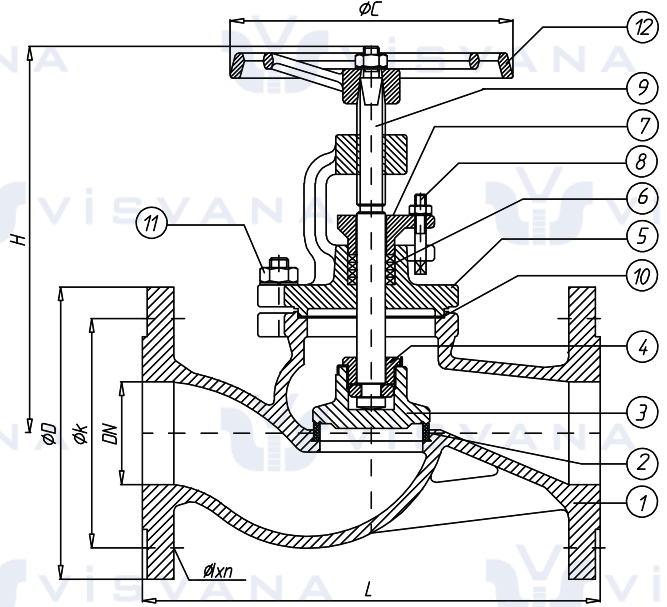

NO	PART NAME	PARÇAADI	MATERIAL / MALZEME	NO	PART NAME	PARÇAADI	MATERIAL / MALZEME
1	Body	Gövde	GG-25 / GGG-40 / GS-25 Bronze/AISI 304/316/Monel/GS-17CrMo5,5	6	Packing	Salmastra	Graphite
2	Seats Ring	Burç	AISI 304, 316, 13Cr Bronze, Stellite 6-21 PTFE, NBR, EPDM	7	Gland	Salm. Baskısı	GG-25 / GGG-40 / GS-25 Bronze/ AISI 304/316/Monel/GS-17CrMo5,5
3	Disc	Klape	AISI 304, 316, 13Cr Bronze, GS-C 25 PTFE	8	T Stud, nut	T Saplı Somun	5.6/8
4	Disc Nut	Baskı	Ms 58/S.S	9	Stem	Mil	AISI 420, 304, 306, 13Cr, Bronze, CuSn8, Ms-58
5	Bonnet	Kapak	GG-25 / GGG-40 / GS-25 Bronze AISI 304, 316 Monel GS-17CrMo5,5	10	Gasket	Conta	Klingerite
				11	Stud, nut	Saplı Somun	5.6/8
				12	Handwheel	El Çarkı	GG 25

Nominal Diameter / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
Valve Dimensions / Vana Boyutları	L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100	1200	1250	1450
DIN 3356/2	ØC	120		140		160	180	200	225	250	285	320	400	460			640			
DIN EN 558-1	H max.	185	185	195	205	230	240	275	290	350	410	430	525	630	700	760	840	915	980	1200
Flange Dimensions / Flanş Ölçüleri	D	95	105	115	140	150	165	185	200	220	250	285	340	400	455	505	565	615	670	780
DIN EN 1092 PN 10	k	65	75	85	100	110	125	145	160	180	210	240	295	350	400	460	515	565	620	725
	Øxn	Ø14x4			Ø18x4			Ø18x8			Ø22x8			Ø22x12			Ø22x16	Ø26x16	Ø26x20	Ø30x20
Weight / Ağırlık (~ for iron)	kg	3,6	4,25	5,15	6,75	9,60	12,0	16,4	23,2	33,0	55,0	87,5	130	204	280	370	505	705	915	1110
Flange Dimensions / Flanş Ölçüleri	D	95	105	115	140	150	165	185	200	220	250	285	340	400	455	520	580	640	715	840
DIN EN 1092 PN 16	k	65	75	85	100	110	125	145	160	180	210	240	295	355	410	470	525	585	650	770
	Øxn	Ø14x4			Ø18x4			Ø18x8			Ø22x8			Ø26x12			Ø26x16	Ø30x16	Ø30x20	Ø33x20
Weight / Ağırlık (~ for iron)	kg	3,6	4,25	5,15	6,75	9,60	12,0	16,4	23,2	33,0	55,0	87,5	136	212	290	380	515	715	925	1125
Flange Dimensions / Flanş Ölçüleri	D	95	105	115	140	150	165	185	200	235	270	300	360	425	485	555	620	670	730	845
DIN EN 1092 PN 25	k	65	75	85	100	110	125	145	160	190	220	250	310	370	430	490	550	600	660	770
	Øxn	Ø14x4			Ø18x4			Ø18x8			Ø22x8			Ø26x8			Ø26x12	Ø30x12	Ø30x16	Ø33x16
Weight / Ağırlık (~ for iron)	kg	4	4,5	5,75	6,85	10,2	12,5	18,5	25,0	35,0	58,0	92,0	150	230	300	395	530	730	950	1150
Flange Dimensions / Flanş Ölçüleri	D	95	105	115	140	150	165	185	200	235	270	300	375	450	515	580	660	685	755	890
DIN EN 1092 PN 40	k	65	75	85	100	110	125	145	160	190	220	250	320	385	450	510	585	610	670	795
	Øxn	Ø14x4			Ø18x4			Ø18x8			Ø22x8			Ø26x8			Ø30x12	Ø33x12	Ø33x16	Ø36x16
Weight / Ağırlık (~ for iron)	kg	4,7	5	6	7	11,5	13	21	27	36	60,5	101	164	235	315	410	550	750	970	1200