


SWING CHECK VALVE SHORT TYPE PN16

VWFCV-16

VIS VANA

Pressure : PN16
 Flanged Ends : DIN, ANSI, JIS Flanged
 Materials : Cast Iron, Ductile Iron,
 Cast Steel, Bronze are available
 Test : EN 12266

No	Part Name	Material
1	Body	Bronze RG5 (CuSn5Zn5Pb5-C)
2	Disc	Bronze RG5 (CuSn5Zn5Pb5-C)
3	Disc Seal(o-ring)	NBR
4	Body gasket	NBR

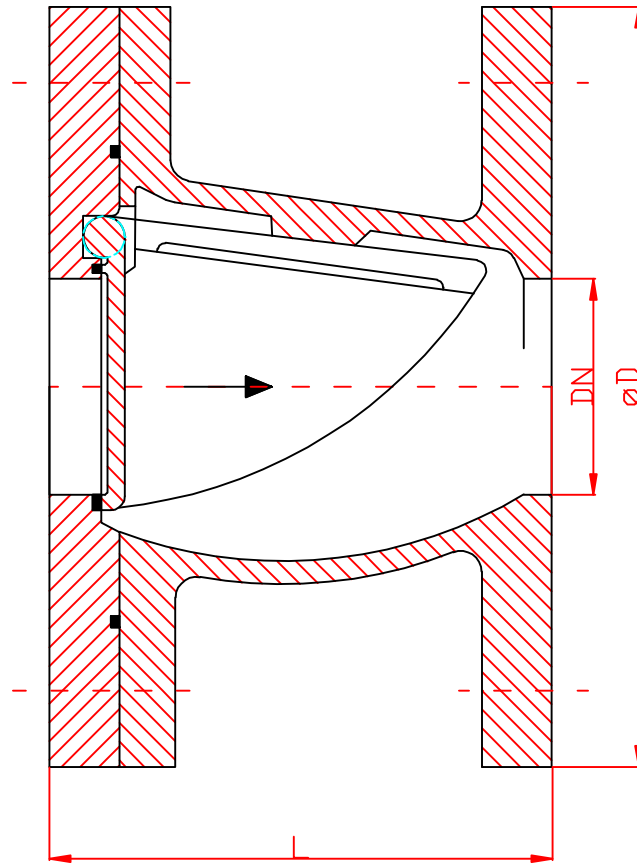

DIMENSIONS	DN	25	32	40
	øD	115	140	150
	L	70	75	80
	KG	3	5	6

DIMENSIONS	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300
	øD	95	105	115	140	150	165	185	200	220	250	285	340	395	445
	L	65	65	70	75	80	85	105	125	145	170	200	255	310	360
	KG	2.1	2.5	3	5	6	7	9	11	16	21	29	44	64	79

DATE: 13/12/2013

DRAWN BY: E.EVRAN

SCALE: -

CHECKED: R.ÖZKUL

APPROVED: I.ÇETIN



SWING CHECK VALVE
 SHORT TYPE PN16