SHORT TYPE SWING CHECK VALVE

DI-VWFCV

Technical Specifications

Design	Special Short Type
Face to Face	Special (Ref. Table)
Size Range	DN15-DN300
Pressure Rate	Max.WP [Bar] (Ref. Table)
Ends Connection	RF DIN Flanges, EN 1092
Temperature Range	-10°C ~ 80°C
Application	water, seawater, waste water

Component List

NO	PART NAME	MATERIAL
1	Body	GGG 40
2	Gasket	Klingerite
3	Flange	GGG 40
4	O-Ring	EPDM / NBR / Viton / PTFE
5	Disc	Bronze Rg5 / SS 304

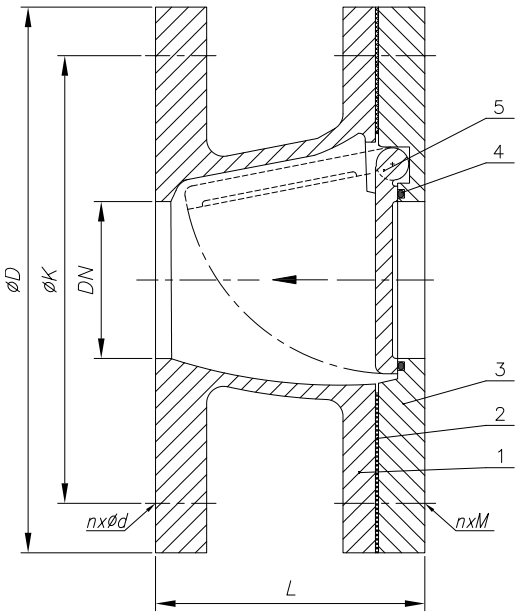

Dimensions

	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300
	Max.WP	16	16	16	16	16	16	16	16	16	16	16	10	10	10
	L	65	65	70	75	80	85	105	125	145	170	200	255	310	360
PN 10	**ØD**	95	105	115	140	150	165	185	200	220	250	285	340	395	445
PN 10	**Øk**	65	75	85	100	110	125	145	160	180	210	240	295	350	400
PN 10	**n x Ød**	4x14	4x14	4x14	4x18	4x18	4x18	4x18	8x18	8x18	8x18	8x22	8x22	12x22	12x22
PN 10	**n x M**	4xM12	4xM12	4xM12	4xM16	4xM16	4xM16	4xM16	8xM16	8xM16	8xM16	8xM20	8xM20	12xM20	12xM20
PN 16	**ØD**	95	105	115	140	150	165	185	200	220	250	285	340	405	460
PN 16	**Øk**	65	75	85	100	110	125	145	160	180	210	240	295	355	410
PN 16	**n x Ød**	4x14	4x14	4x14	4x18	4x18	4x18	4x18	8x18	8x18	8x18	8x22	12x22	12x26	12x26
PN 10	**n x M**	4xM12	4xM12	4xM12	4xM16	4xM16	4xM16	4xM16	8xM16	8xM16	8xM16	8xM20	12xM20	12xM24	12xM24
	Kg	2	2.5	3	4	5	6	8.5	10.5	12	20	26	43	61	80

Designs, materials and specifications shown are subject to change without notice. VIS VANA reserves the right to modify information.