


Technical Specifications

Design	ASME B16.34
Face to Face	EN 5558 Series 3, ASME B16.10
Size Range	DN50-DN200
Pressure Rate	Max.WP [Bar] (Ref. Table)
Ends Connection	RF Flanges, EN 1092 / ASME B16.5
Temperature Range	-10°C ~ 425°C
Application	Bitumen, Asphalt, Pitch



Component List

No.	Part Name	Material
1	Body	GG25/GGG40/GSC25/304/316
2	Plug	GG25/GGG40/GSC25/304/316
3	Gasket	Klingerit/Graphite
4	Bonnet	GG25/GGG40/GSC25/304/316
5	Packing	Graphite
6	Gland	GG25/GGG40/GSC25/304/316

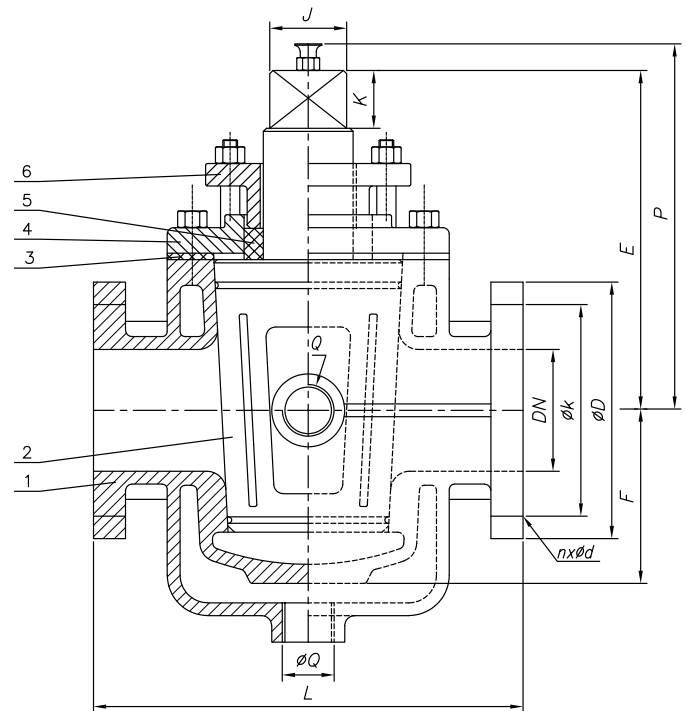

Dimensions

	DN	50	65	80	100	125	150	200
	Max.WP	40	40	40	40	40	40	40
	L	178	191	203	229	254	267	292
	E	160	173	211	230	265	292	327
	J	27	32	37	41	41	54	54
	K	27	32	38	46	46	60	60
	Q	3/4"	1"	1"	1"	1"	1"	1"
PN 16	ØD	165	185	200	220	250	285	340
PN 16	Øk	125	145	160	180	210	240	295
PN 16	n x Ød	4x18	4x18	8x18	8x18	8x18	8x22	12x22
PN 25	ØD	165	185	200	235	270	300	360
PN 25	Øk	125	145	160	190	220	250	310
PN 25	n x Ød	4x18	8x18	8x18	8x22	8x26	8x26	12x26
PN 40	ØD	165	185	200	235	270	300	375
PN 40	Øk	125	145	160	190	220	250	320
PN 40	n x Ød	4x18	8x18	8x18	8x22	8x26	8x26	12x30
CL150	ØD	152.5	178	190.5	228.5	254	279.5	343
CL150	Øk	120.7	139.7	152.4	190.5	215.9	241.3	298.5
CL150	n x Ød	4x19	4x19	4x19	8x19	8x22	8x22	8x22
	Kg	15	20	28	32	60	87	105

Designs, materials and specifications shown are subject to change without notice. VIS VANA reserves the right to modify information.