

ANGLE TYPE LIFT CHECK VALVE

KÖŞE TİP YAYLI ÇEK VALF

VABC-16



Design / Dizayn: DIN 3356


Face to Face / L Boyu : EN 558 Serie 8, DIN 3202-F32

Pressure / Basınç : PN 10, 16, 25, 40

Size Range / Ölçü Aralığı: DN15-DN500

Flange Ends / Flanş: EN 1092-1

Tests / Testler : EN 12266

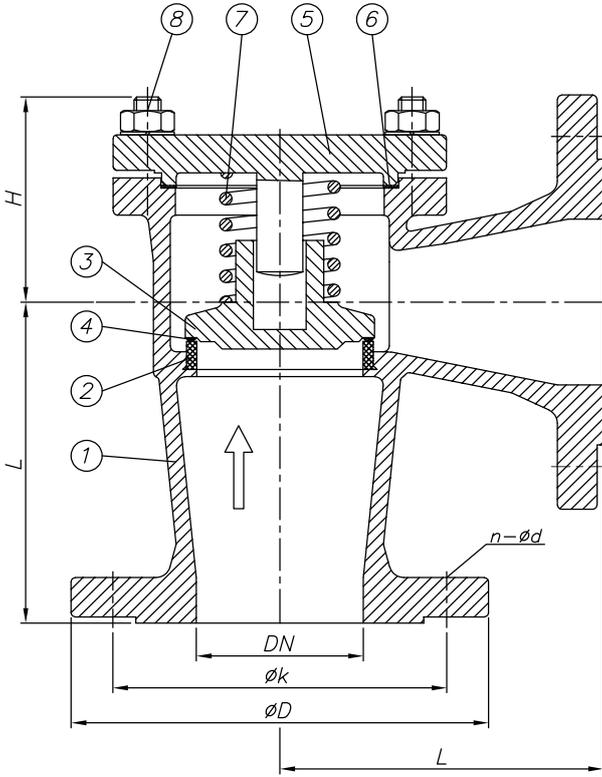

3

Check Valves

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG 40 / GS-C25 / Bronze Rg5 / CuSn10 / SS 304 / SS 316	5	Bonnet	Kapak	GG 25 / GGG 40 / GS-C25 / Bronze Rg5 / CuSn10 / SS 304 / SS 316
2	Body Seat	Gövde Burcu	Brass Ms58 / Bronze Rg5 / SS 420 / SS 304 / SS 316	6	Gasket	Conta	Klingerite
3	Disc	Klape	GG 25 / GGG 40 / GS-C25 / Bronze Rg5 / CuSn10 / SS 304 / SS 316	7	Spring	Yay	SS 304
4	Disc Seat	Klape Burcu	Brass Ms58 / Bronze Rg5 / SS 420 / SS 304 / SS 316	8	Stud , Nut	Saplama,Somun	Galvanized Steel, A2 (SS304)

Nominal Diameter / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500		
FTF Dimensions / Boyutları DIN 3202-F32 / EN 558-S8	L	90	95	100	105	115	125	145	155	175	200	225	275	325	375	425	475	500	515		
	H	55	55	65	70	85	90	100	105	120	145	150	185	190	240	280	320	340	360		
Flange Dimensions / Flanş Boyutları EN 1092	PN 6	ØD	80	90	100	120	130	140	160	190	210	240	265	320	375	440	490	540	595	645	
		ØK	55	65	75	90	100	110	130	150	170	200	225	280	335	395	445	495	550	600	
		n - Ød	4-11			4-14			4-18			8-18			12-18		12-22		16-22		20-22
	PN 10	ØD	95	105	115	140	150	165	185	200	220	250	285	340	395	445	505	565	615	670	
		ØK	65	75	85	100	110	125	145	160	180	210	240	295	350	400	460	515	565	620	
		n - Ød	4-14			4-18			8-18			8-22			12-22		16-22		16-26		20-26
	PN 16	ØD	95	105	115	140	150	165	185	200	220	250	285	340	405	460	520	580	640	715	
		ØK	65	75	85	100	110	125	145	160	180	210	240	295	355	410	470	525	585	650	
		n - Ød	4-14			4-18			8-18			8-22			12-22		16-26		16-30		20-30
	PN 25	ØD	95	105	115	140	150	165	185	200	235	270	300	360	425	485	-	-	-	-	
		ØK	65	75	85	100	110	125	145	160	190	220	250	310	370	430	-	-	-	-	
		n - Ød	4-14			4-18			8-18		8-22		8-26		12-26		12-30		16-30		-
	PN 40	ØD	95	105	115	140	150	165	185	200	235	270	300	375	450	515	-	-	-	-	
		ØK	65	75	85	100	110	125	145	160	190	220	250	320	385	450	-	-	-	-	
		n - Ød	4-14			4-18			8-18		8-22		8-26		12-30		12-33		16-33		-
	Weight / Ağırlık	kg	3	3.5	4	6	8	10	14	19	25	45	65	110	140	250	320	-	-	-	