


FLANGED TYPE BUTTERFLY VALVE FLANŞLI TİP KELEBEK VANA

VFKF-16



Pressure Rate / Basınç Aralığı : Max. PN16
Size Range / Ölçü Aralığı: DN50 - DN600
Face to Face / L Boyu : EN 558 Serie 13,
DIN 3202-F16, BS 5155
Tests / Testler : EN 12266

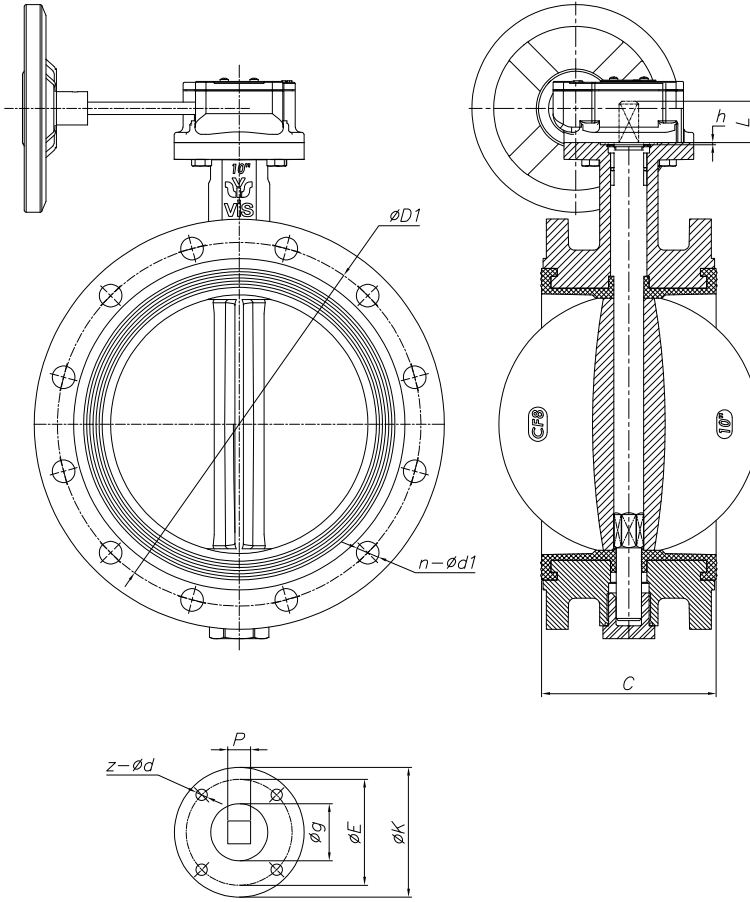

4

Butterfly Valves

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GGG40 / WCB / Bronze Rg5 / Al-Bronze / SS304/ SS316	4	Disc	Klape	GGG40 / WCB / Al-Bronze / SS304 / SS316
2	Seat	Conta	EPDM / NBR / VITON / PTFE	5	Bushing	Burç	Polymers
3	Shaft	Mil	SS 420 / SS 304 / SS 316	6	O-Ring	O-Ring	NBR

Nominal Diameter / Anma Çapı		DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
			2"	2,5"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
Valve Dimensions / Vana Boyutları EN 558 S13 / DIN 3202 F16 / BS 5155		C	108	112	114	127	140		152	165	178	190	216	222	229	267	
Flange Dimensions / Üst Flanş Boyutları DIN EN ISO 5211		ØK	65			90			125			175			210		
		ØE	50			70			102			140			165		
		Øg	35			55			70			100			130		
		z x Ød	4xØ7			4xØ9			4xØ12			4xØ18			4xØ23		
		h	3									4			5		
Stem Dimensions / Mil Boyutları DIN 3337		L	32						45				46	51	64	70	
		P	9			11	14		17	22			27			36	
Flange Dimensions / Flanş Boyutları		PN 6	ØD1	110	130	150	170	200	225	280	335	395	445	495	550	600	705
			n - Ød1	4-14		4-18		8-18		12-18		12-23		16-23		20-23	20-28
EN 1092 - PN6- PN10- PN16		PN 10	ØD1	125	145	160	180	210	240	295	350	400	460	515	565	620	725
			n - Ød1	4-18		8-18		8-23		12-23		16-23		16-27	20-27		20-30
ASME B16.5 - Class 150		PN 16	ØD1	125	145	160	180	210	240	295	355	410	470	525	585	650	770
			n - Ød1	4-18		8-18		8-23	12-23	12-27		16-27	16-30	20-30	20-33	20-36	
JIS B2220 - 5K - 10K		Class 150	ØD1	120.7	139.7	152.4	190.5	215.9	241.3	298.5	362	431.8	476.3	539.8	877.9	635	749.3
			n - Ød1	4-19			8-19		8-22		12-25		12-29	16-29	16-32	20-32	20-35
		5K	ØD1	105	130	145	165	200	230	280	345	390	435	495	555	605	715
			n - Ød1	4-15		4-19	8-19			8-23	12-23		12-25	16-25		20-25	20-27
		10K	ØD1	120	140	150	175	210	240	290	355	400	445	510	565	620	730
			n - Ød1	4-19		8-19		8-23		12-23	12-25	16-25		16-27	20-27		24-33
Weight / Ağırlık		kg	8	9	11	13	17	23	32	50	65	95	130	150	200	300	