

# BALL CHECK VALVE


## TOPLU ÇEK VALF

# VTCV-10



Face to Face / L Boyu : EN 558 Serie 48,  
DIN 3202 F6

Tests / Testler : EN 12266

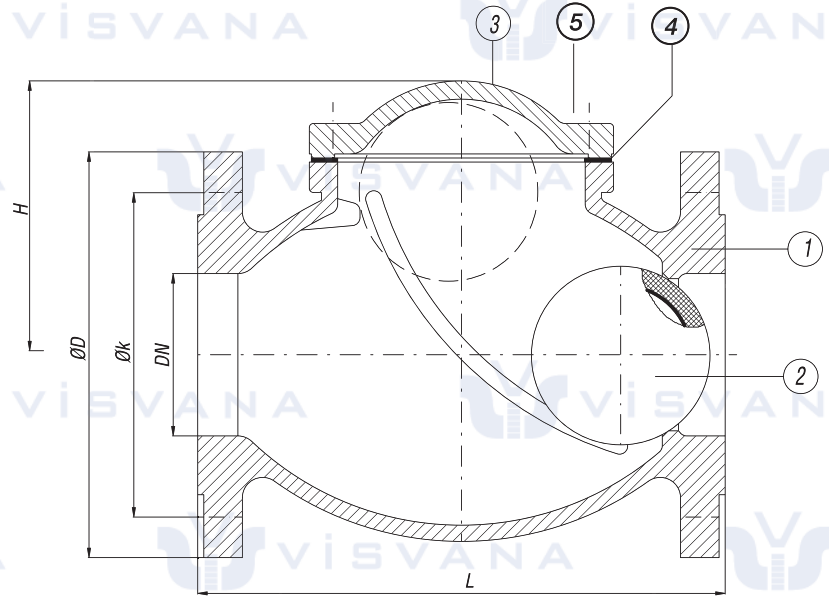

# 3

Check Valves

| NO | PART NAME | PARÇA ADI | MATERIAL / MALZEME   |
|----|-----------|-----------|----------------------|
| 1  | Body      | Gövde     | GG 25 / GGG 40 / 50  |
| 2  | Ball      | Küre      | NBR + (GG-25) St-37  |
| 3  | Bonnet    | Kapak     | GG 25 / GGG 40 / 50  |
| 4  | Gasket    | Conta     | NBR                  |
| 5  | Bolt      | Civata    | 5D / Paslanmaz Çelik |

| Nominal Pressure / Anma Basıncı                                | PN 10 |     |     |     |     |     |     |     |     |     |     |     |     |      |
|----------------------------------------------------------------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Nominal Diameter / Anma Çapı                                   | DN    | 40  | 50  | 65  | 80  | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 500  |
| Valve Dimensions / Vana Boyutları<br>DIN 3202/2-F6             | L     | 180 | 200 | 240 | 260 | 300 | 350 | 400 | 500 | 600 | 700 | 800 | 900 | 1100 |
|                                                                | H     | 100 | 110 | 130 | 145 | 170 | 195 | 205 | 260 | 390 | 500 | 500 | 600 | 800  |
| Flange Dimensions / Flanş Ölçüleri<br>DIN 2501/TS 810    PN 10 | D     | 150 | 165 | 185 | 200 | 220 | 250 | 285 | 340 | 395 | 445 | 505 | 565 | 670  |
|                                                                | k     | 110 | 125 | 145 | 160 | 180 | 210 | 240 | 295 | 350 | 400 | 460 | 515 | 620  |
| Weight / Ağırlık (~ for iron)                                  | kg    | 8   | 9   | 12  | 14  | 22  | 30  | 49  | 98  | 125 | 240 | 390 | 470 | 800  |