


UNDER GROUND HYDRANT (SHORT TYPE) YER ALTI YANGIN HİDRANTI

VKYV-10-16



Nominal Pressure / Anma Basıncı: PN10-PN16
Nominal Diameter / Anma Çapı: DN80
Dimensions / Boyutlar: DIN 3221 / TS 2821/2

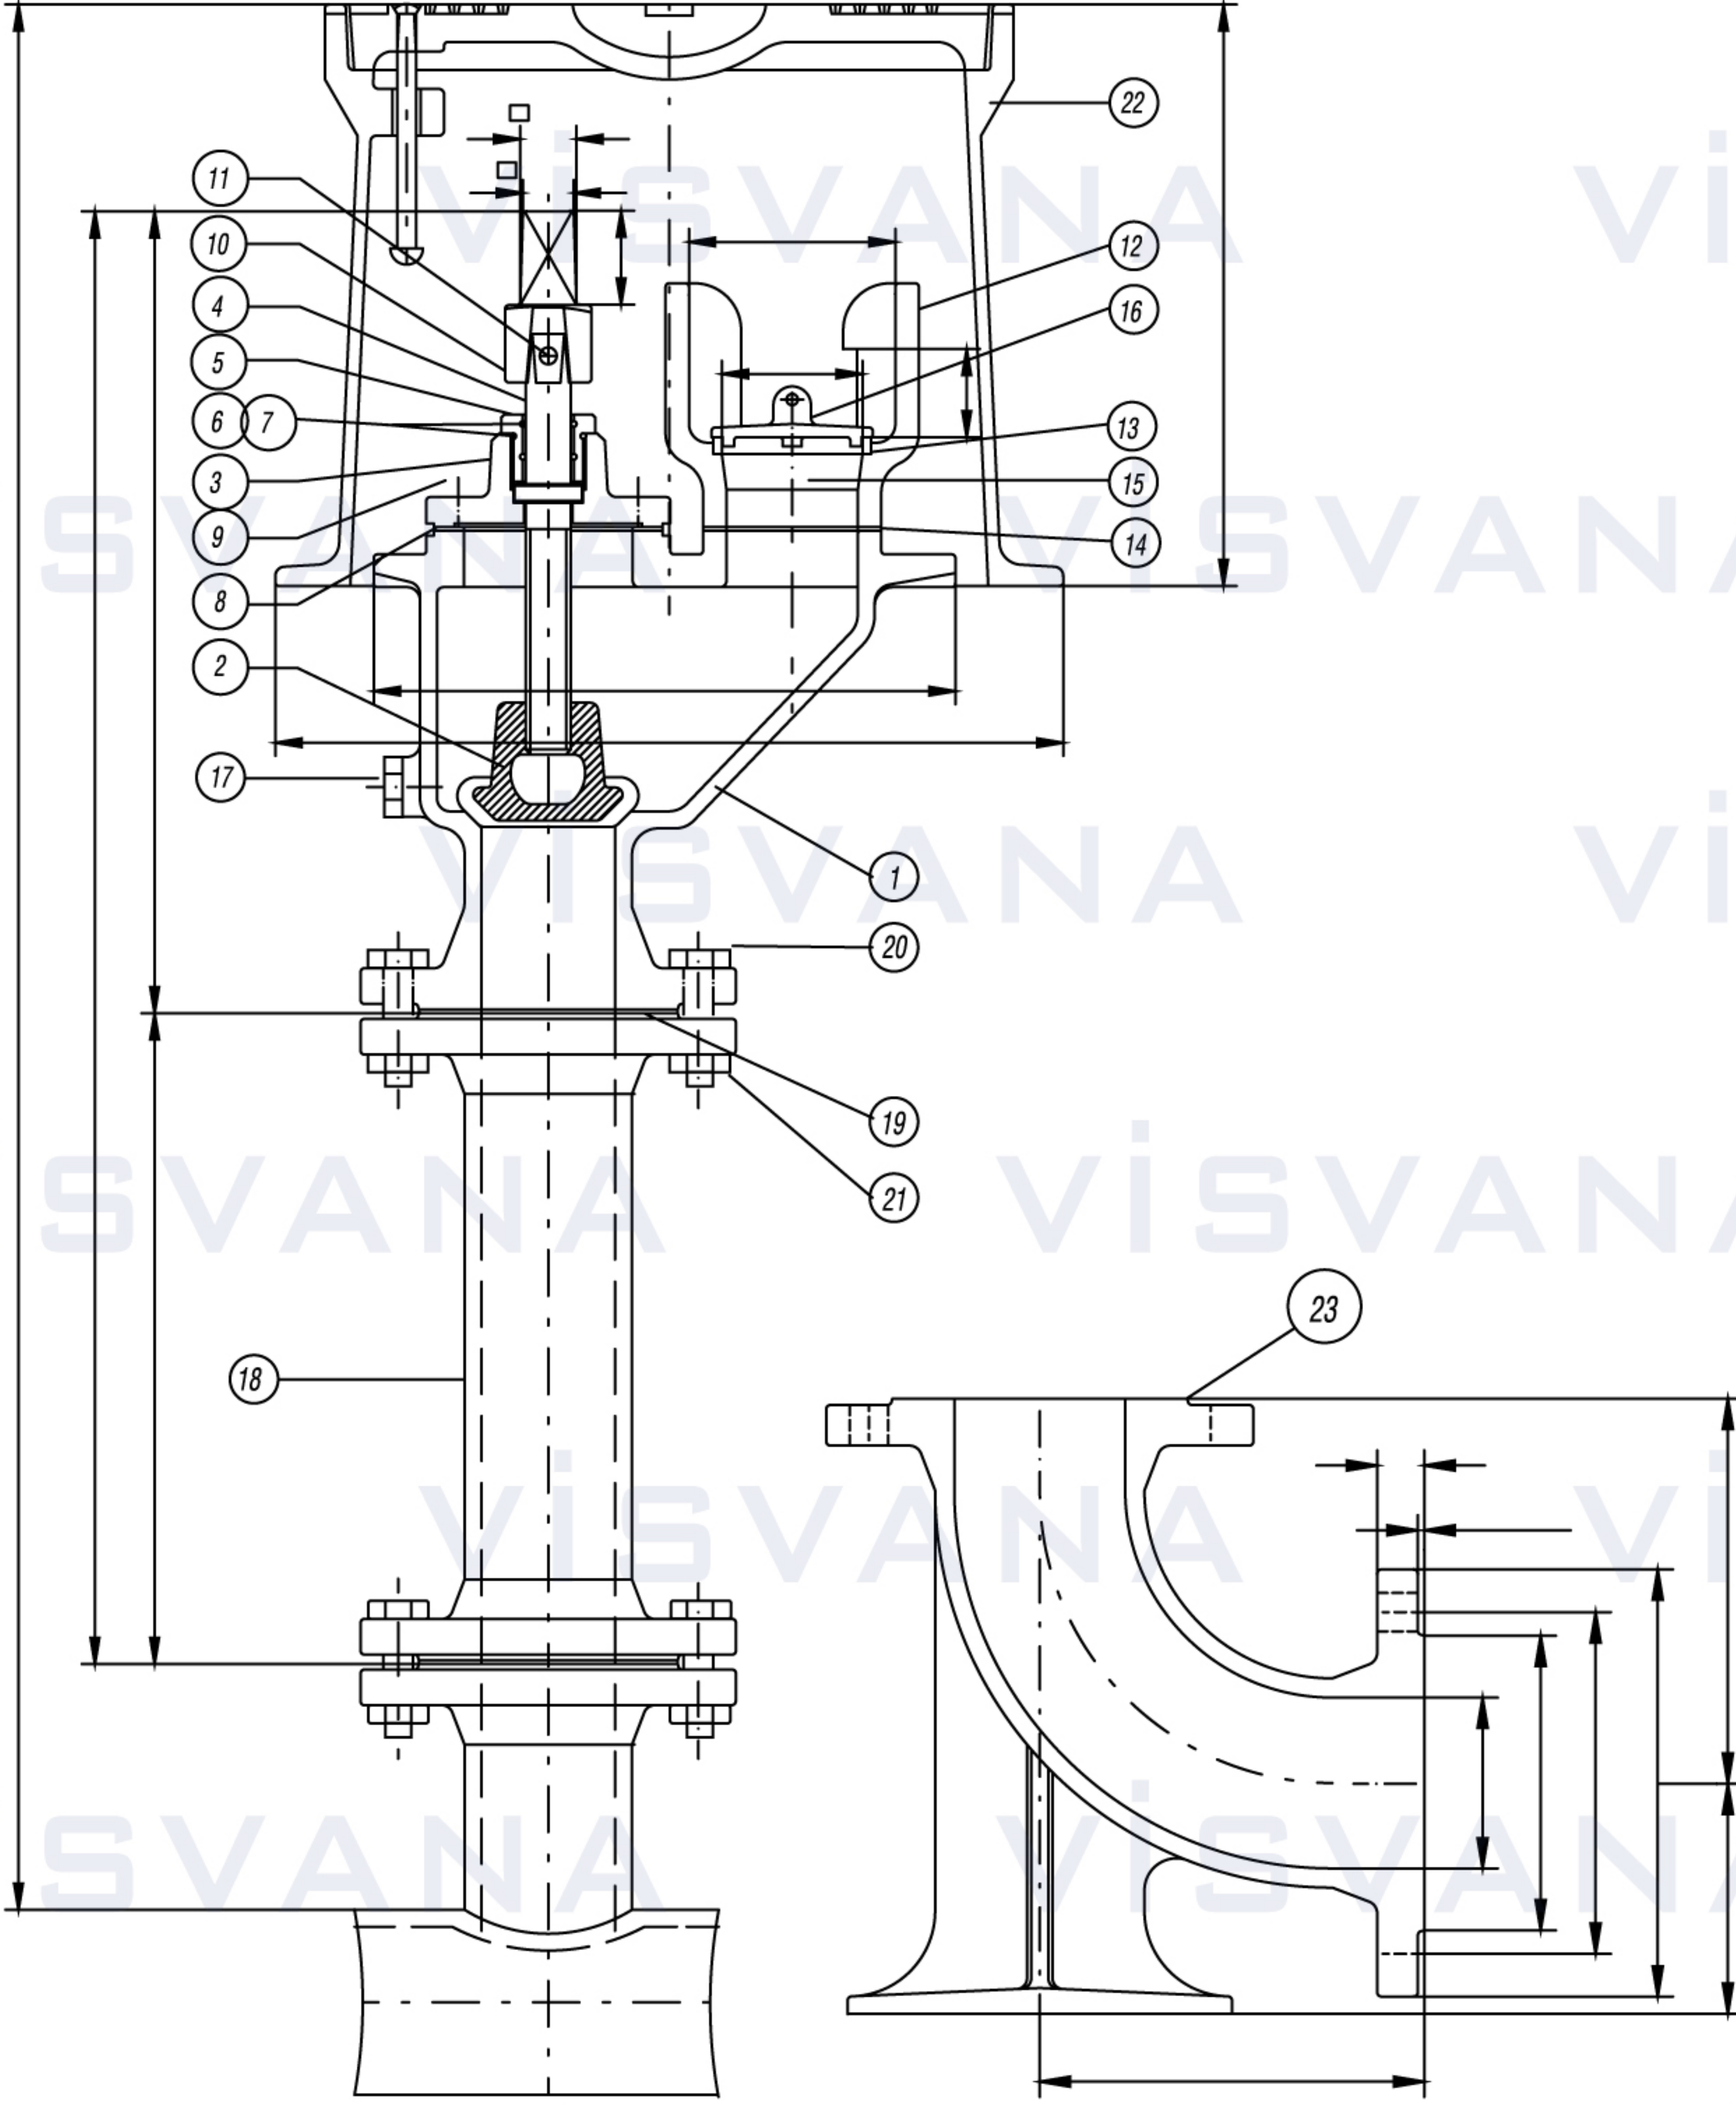

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG-40-50	13	Outlet Seat	Kurt Ağzı Burcu	Ms 58 / AISI 304
2	Valve Cone	Kapama Elemanı	GG 25 / GGG-40-50	14	Gasket	Conta	EPDM
3	Cover	Kapak	GG 25 / GGG-40-50	15	Bolt	Civata	5 D / SS
4	Stem	Mil	AISI 1304 / Ms-58	16	Outlet Cover	Kapak	GG 25
5	O-Ring Nut	O-Ring Somunu	AISI 1304 / Ms-58	17	Drainage Plug	Drainage Plug	Ms 58 / Bronze
6	O-Ring	O-Ring	EPDM	18	Flanged Piece	Flanged Piece	GG 25 / GGG-40/50
7	O-Ring	O-Ring	EPDM	19	Gasket	Gasket	EPDM
8	Gasket	Conta	EPDM	20	Bolt	Bolt	5 D / SS
9	Bolt	Civata	5 D/SS	21	Nut	Nut	5D / Paslanmaz Çelik
10	Cap	Mil Başlığı	GG 25	22	Surface Box	Surface Box	GG 25
11	Cotter Pin	Kopilya	St 37 / AISI 304	23	90° N-Piece	90° Dirsek	GG 25 / GGG-40/50
12	Outlet	Kurt Ağzı	GG 25 / GGG-40-50				

9

Fire & Irrigation
Hydrants