


Face to Face / L Boyu : EN 558 Serie 1,
DIN 3202 F1

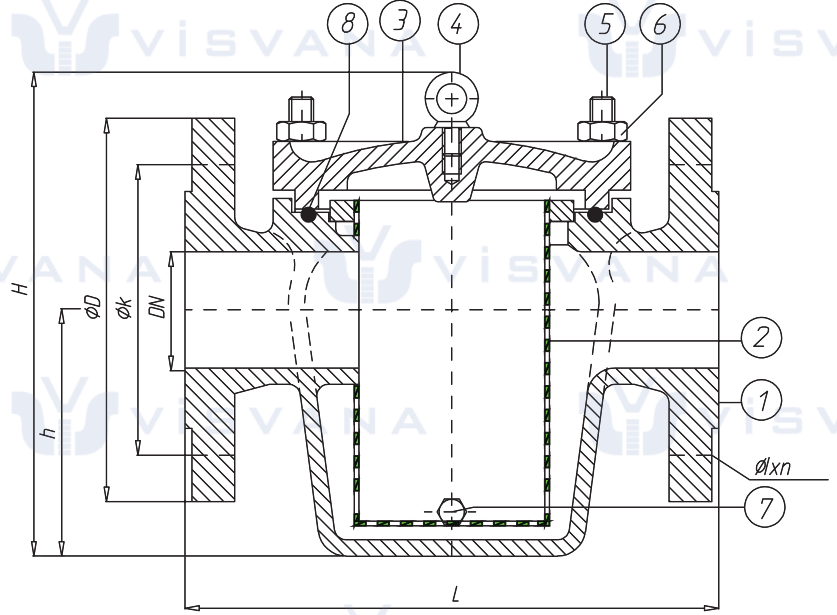

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG-25 / GGG-40 / GS-C 25 / Bronze / SS 304 / SS 316
2	Screen	Filtre	AISI 304 / AISI 316 / Copper
3	Bonnet	Kapak	GG-25 / GGG-40 / GS-C 25 / Bronze / SS 304 / SS 316
4	Ring Screw	Mapa	St / SS
5	Stud	Saplama	St / SS
6	Nut	Somun	St / SS
7	Plug	Tapa	St / SS / Brass
8	O-Ring	O-Ring	NBR

Nominal Pressure / Anma Basıncı	PN	PN 4												PN 2,5	
Nominal Diameter / Anma Çapı	DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600
Valve Dimensions / Vana Boyutları DIN 3202 F1	L	200	230	290	310	350	400	480	600	600	700	800	840	1000	1100
	H	205	225	260	310	345	395	465	565	610	675	790	900	1100	1100
	h	95	106	134	156	185	225	265	335	345	390	425	470	525	670
Flange Dimensions / Flanş Ölçüleri DIN EN 1092 PN 10	D	150	165	185	200	220	250	285	340	400	455	505	565	670	780
	k	110	125	145	160	180	210	240	295	350	400	460	515	620	725
	Øxn	Ø18x4			Ø18x8			Ø22x8		Ø22x12		Ø22x16	Ø26x16	Ø26x20	Ø30x20
Weight / Ağırlık	kg	14	19	26	33	45	60	86	147	180	245	325	415	550	815
Flange Dimensions / Flanş Ölçüleri DIN EN 1092 PN 16	D	150	165	185	200	220	250	285	340	400	455	520	580	715	840
	k	110	125	145	160	180	210	240	295	355	410	470	525	650	770
	Øxn	Ø18x4			Ø18x8			Ø22x8	Ø22x12	Ø26x12		Ø26x16	Ø30x16	Ø33x20	Ø36x20
Weight / Ağırlık (~ for iron)	kg	14	19	26	33	45	60	86	150	185	250	330	420	560	825