

JIS 16K STRAIGHT GLOBE VALVE

JIS 16K DÜZ TİP GLOB VANA

JIS F7303

JIS F7409



Design / Dizayn: JIS F7303 STOP

JIS F7409 SDNR

Pressure Rate / Basınç Aralığı: 16 K

Size Range / Ölçü Aralığı: DN15-DN40


Temperature / Sıcaklık: Steam < 205 °C

Water < 120 °C


Flange Ends / Flans: JIS B2240 - 16K

Inspection / Teftiş: JIS F7400



Application : Air, Gas, Oil, Pulsation Water



Indicator



Screw Down Non Return (SDNR)

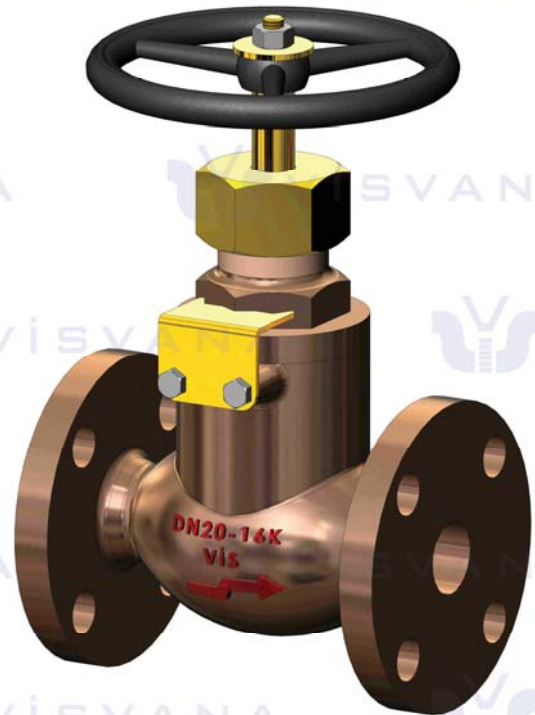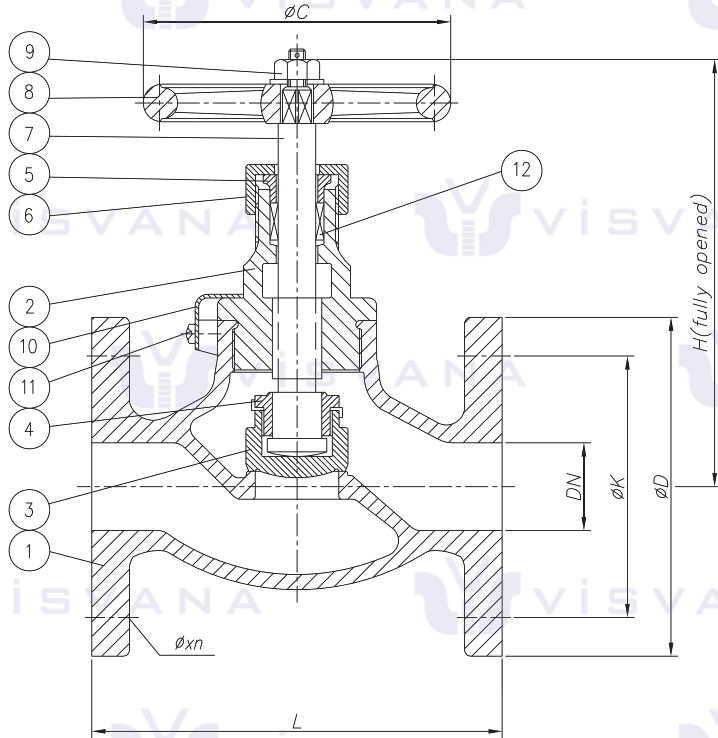

JIS Valves

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	Bronze Rg5	8	Handwheel	Volan	GG 25
2	Bonnet	Kapak	Bronze Rg5	9	Nut	Somun	Brass / SS 304
3	Disc	Klape	Brass / Bronze	10	Lock Plate	Kilit plakası	Brass / SS 304
4	Disc Nut	Baskı	Brass	11	Screw	Vida	Brass / SS 304
5	Packing Gland	Salm. Baskısı	Brass	12	Packing	Salmastra	Graphite
6	Gland Nut	Baskı Somunu	Brass				
7	Stem	Mil	Brass				

Dimensions / Ölçüler

DN	L	H	C	D	K	Øxn	kg	IMPA STOP	IMPA SDNR
15	110	130	80	95	70	Ø15x4	2.76	750141	751071
20	120	140	100	100	75	Ø15x4	3.72	750142	751072
25	130	160	125	125	90	Ø19x4	5.20	750143	751073
32	160	170	125	135	100	Ø19x4	6.91	750144	751074
40	180	190	140	140	105	Ø19x4	8.43	750145	751075

12