



JIS ANGLE TYPE STORM VALVE

JIS KÖŞE TİP FIRTINA VANASI

JIS F3060K

vis

Design / Dizayn: JIS F3060 Angle Type
Pressure Rate / Basınç Aralığı: 5K / 10K
Size Range / Ölçü Aralığı: DN50-DN150
Flange Ends / Flanş: JIS B2239 - 5K / 10K
Inspection / Teftiş: JIS F7400
Application : Aboard ships for Wastewater.

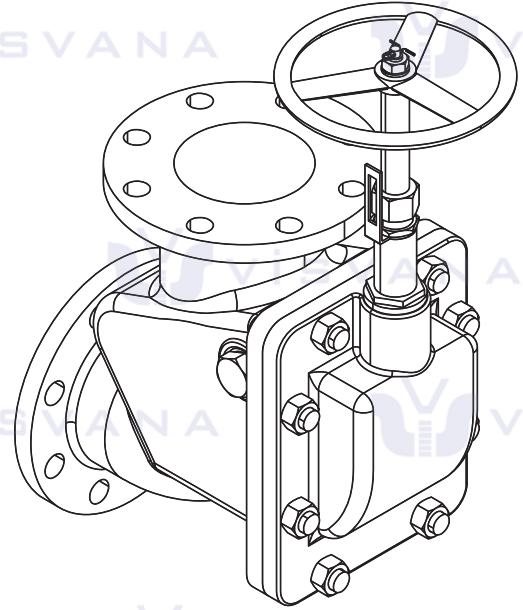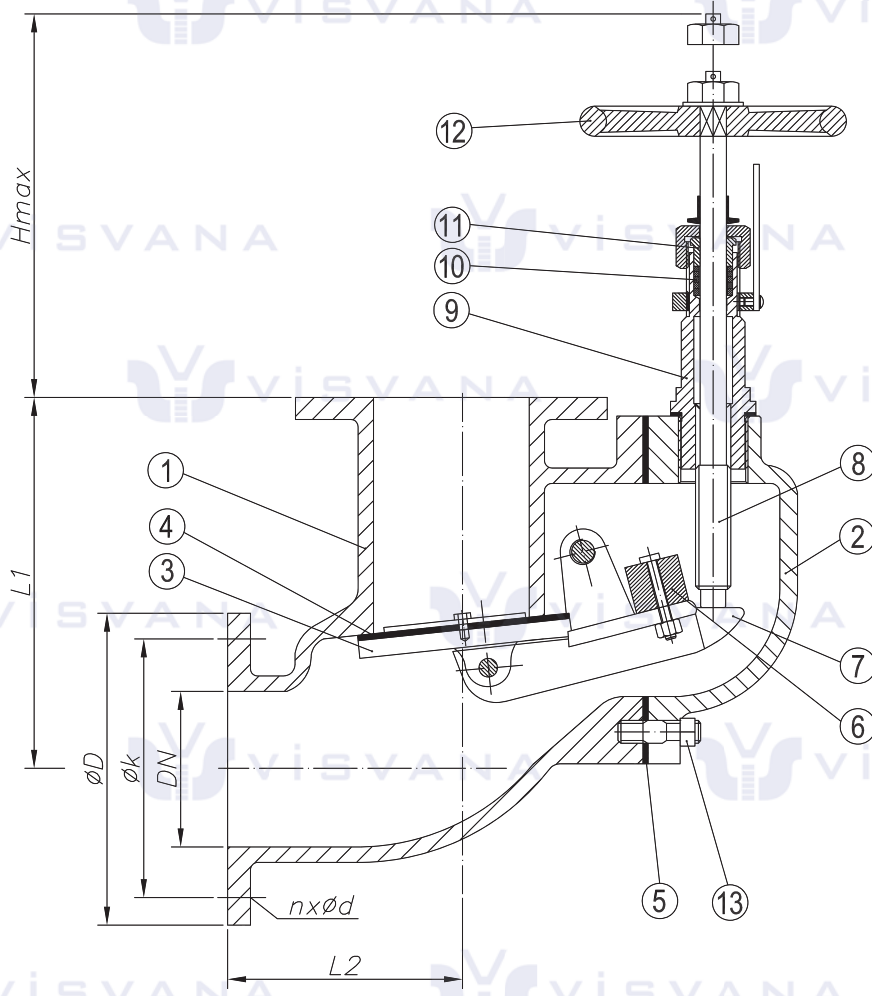

JIS
JIS Valves

NO	PART NAME	PARÇAADI	MATERIAL / MALZEME	NO	PART NAME	PARÇAADI	MATERIAL / MALZEME
1	Body	Gövde	Cast Steel	8	Spindle	Mil	Stainless Steel
2	Cover	Kapak	Cast Steel	9	Spindle Box	Mil Kutusu	Bronze
3	Disc	Klape	Bronze	10	Packing	Salmastra	Graphite
4	Gasket	Conta	NBR	11	Gland	Baskı	Brass
5	Gasket	Conta	Non-Asbestos	12	Handwheel	Volan	Cast Iron
6	Arm	Kol	Bronze	13	Stud/Nut	Saplama/Somun	Carbon Steel
7	Counterweight	Karşı Ağırlık	Cast Iron				

Dimensions / Ölçüler				JIS 5K			JIS 10K		
DN	L1	L2	H _{max}	D	K	Øxn	D	K	Øxn
50	170	90	187	130	105	Ø15x4	155	120	Ø19x4
65	200	110	175	155	130	Ø15x4	175	140	Ø19x4
80	220	120	180	180	145	Ø19x4	185	150	Ø19x8
100	250	130	175	200	165	Ø19x8	210	175	Ø19x8
125	270	150	192	235	200	Ø19x8	250	210	Ø23x8
150	310	165	187	265	230	Ø19x8	280	240	Ø23x8

12