
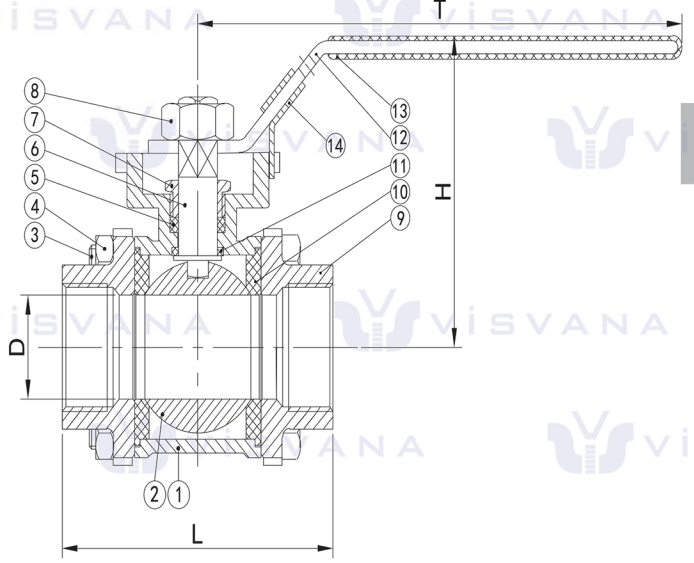


SS 3PC BALL VALVE M3 - ISO 5211 - BSP

3P DİŞLİ PASLANMAZ KÜRESEL VANA

VTDK-63

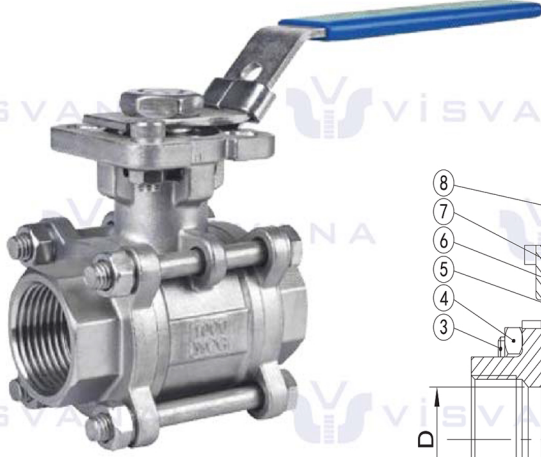

Pressure Rate / Basınç Aralığı: 63 Bar
Size Range / Ölçü Aralığı: DN8-DN100
Ends / Bağlantı: BSP
Temperature / Sıcaklık: -20~180 °C
Application / Uygulama: Water, Oil and Gas.

BSP

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	CF8 / CF8M	8	Nut	Somun	SS201 / SS304
2	Ball	Küre	SS304 / SS316	9	Cap	Kapak	CF8 / CF8M
3	Bolt	Cıvata	SS201 / SS304	10	Seat	Küre Yatağı	PTFE
4	Nut	Somun	SS201 / SS304	11	Washer	Pul	PTFE
5	Packing	Salmastra	PTFE	12	Lever	Kol	SS201 / SS304
6	Stem	Mil	SS304 / SS316	13	Lever Cover	Kol Kapağı	PVC
7	Gland	Gland	SS201 / SS304	14	Lock	Kilit	SS201 / SS304

Dimensions / Ölçüler

DN	L	D	H	T	Rc	ISO 5211
8	65	8	65	131	1/4"	F03/F04
10	65	10	65	131	3/8"	F03/F04
15	75	15	63	131	1/2"	F03/F04
20	80	20	74	131	3/4"	F03/F04
25	90	25	86	167	1"	F04/F05
32	110	32	95	167	1-1/4"	F04/F05

Dimensions / Ölçüler

DN	L	D	H	T	Rc	ISO 5211
40	120	40	116	193	1-1/2"	F05/F07
50	140	50	122	193	2"	F05/F07
65	185	65	147	242	2-1/2"	F07/F10
80	205	80	153	272	3"	F07/F10
100	235	100	167	295	4"	F07/F10

13