

Design / Dizayn: JIS F7308 STOP
JIS F7376 SDNR


Pressure Rate / Basınç Aralığı: 10 K

Size Range / Ölçü Aralığı: DN50-DN400


Flange Ends / Flanş: JIS B2239 - 10 K

Inspection / Teftiş: JIS F7400

Application : Aboard ships for hot and cold
Water, Oil and Steam.



Screw Down Non Return
(SDNR)

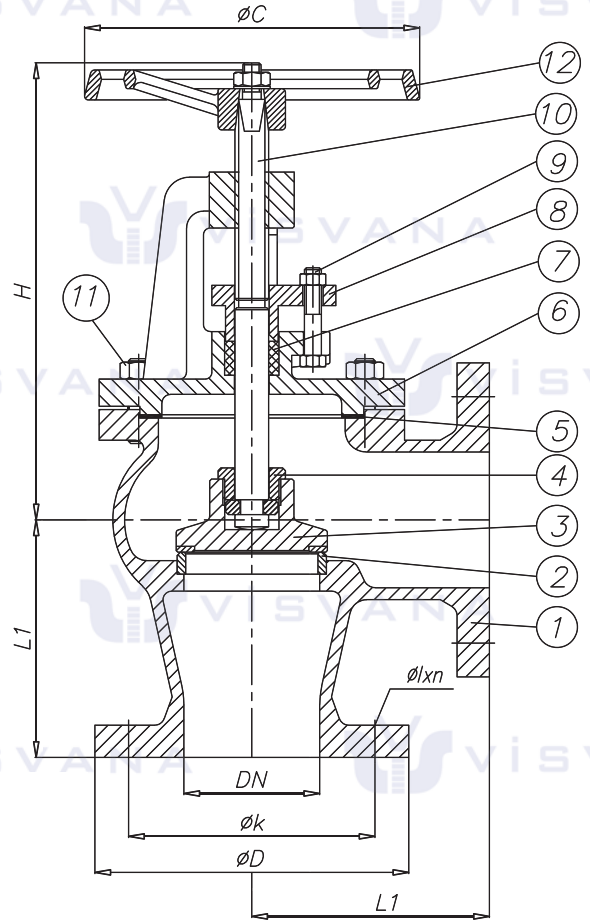

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG 40 / GS-C25	8	Gland	Baskı	GG 25 / GGG 40 / GS-C25
2	Seat	Burç	Bronze Rg5 / 13Cr / SS 304	9	Bolt/Nut	Cıvata/Somun	Galvanized Steel
3	Disc	Klape	GG 25 / GGG 40 / GS-C25	10	Stem	Mil	CuZn35Ni / 13Cr / SS 304
4	Disc Nut	Baskı	Brass / 13Cr	11	Stud/Nut	Cıvata/Somun	Galvanized Steel
5	Gasket	Conta	Klingerite	12	Handwheel	Volan	GG 25
6	Bonnet	Kapak	GG 25 / GGG 40 / GS-C25				
7	Packing	Salmastra	Graphite				

Dimensions / Ölçüler

DN	L	H	C	D	K	Øxn	kg	IMPA STOP	IMPA SDNR
50	120	230	160	155	120	Ø19x4	9.50	750246	751141
65	130	270	180	175	140	Ø19x4	13.0	750247	751142
80	140	280	200	185	150	Ø19x8	19.3	750248	751143
100	160	305	220	210	175	Ø19x8	23.5	750249	751144
125	180	355	250	250	210	Ø23x8		750250	751145
150	205	390	300	280	240	Ø23x8		750251	751146

Dimensions / Ölçüler

DN	L	H	C	D	K	Øxn	kg	IMPA STOP	IMPA SDNR
200	230	485	400	330	290	Ø23x12		750252	751147
250	290	540	400	400	355	Ø25x12		750253	-
300	320	610	500	445	400	Ø25x16		750254	-
350	360	690	500	490	445	Ø25x16		750255	-
400	420	770	630	560	510	Ø27x16		750256	-