


NOZZLE (SILENT) CHECK VALVE NOZUL (DİK) ÇEK VALF

VDCV 10-16-25-40



Pressure Rate / Basınç Aralığı : PN 10 -16 -25 -40
Size Range / Ölçü Aralığı: DN40 - DN500
Flange Ends / Flanş : EN 1092, BS 4504
Tests / Testler : EN 12266 & API 598

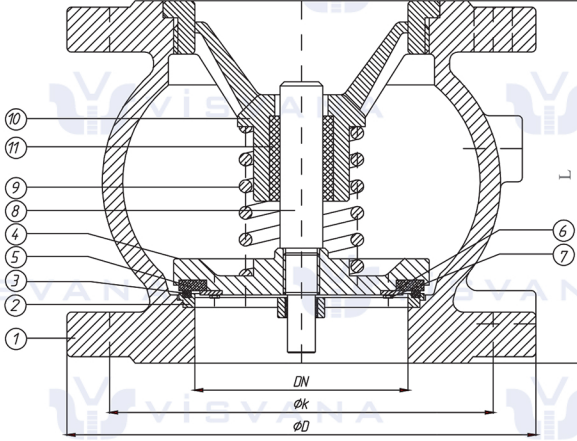

Note: 6" Class 300 A351 CF8M NOZZLE CHECK VALVE

3
Check Valves

LEAKAGE TEST EN 12266-A

PN	Disc test x 1,1	Body test x 1,5
PN 10	11 Bar	15 Bar
PN 16	18 Bar	24 Bar
PN 25	28 Bar	38 Bar
PN 40	44 Bar	60 Bar

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG25 / GGG-40 / GS-C 25 / SS 304 / 316	7	Plate	Conta Sacı	St, SS
2	Lower Guide	Alt Kayıt	GG25 / GGG-40 / GS-C 25 / SS 304 / 316	8	Stem	Mil	Brass / SS
3	Seat	Burc	Brass / Bronze / SS	9	Spring	Yay	SS
4	Disc	Klape	GG-25 / GGG-40 / GS-C 25 / Bronze / SS	10	Upper Guide	Üst Kayıt	GG25 / GGG-40 / GS-C 25 / SS 304 / 316
5	Seal	Conta	EPDM / NBR / Teflon / Bronze / SS	11	Bush	Burc	Brass / Bronze / Teflon
6	Bolt	Civata	St, SS				

Nominal Pressure / Anma Basıncı	PN10							PN16						
Nominal Diameter / Anma Çapı	DN	40	50	65	80	100	125	150	200	250	300	350	400	500
Valve Dimensions / Vana Boyutları	L	85	100	120	140	170	200	230	288	354	395	472	560	670
Flange Dimensions / Flanş Ölçüleri	D	150	165	185	200	220	250	285	340	400	455	505	565	670
DIN EN 1092 PN 10	k	110	125	145	160	180	210	240	295	350	400	460	515	620
Flange Dimensions / Flanş Ölçüleri	D	150	165	185	200	220	250	285	340	400	455	520	580	715
DIN EN 1092 PN 16	k	110	125	145	160	180	210	240	295	355	410	470	525	650