

2-PCS BALL VALVE, FULL BORE

2 PARÇALI KÜRESEL VANA, TAM GEÇİŞLİ

VKVP-16



Design / Dizayn: DIN 3357

Face to Face / L Boyu:

DN(15-100): EN 558 Serie 14, DIN 3202-F4



DN(125-250): EN 558 Serie 15, DIN 3202-F5

Mounting Pad: ISO 5211

Size Range / Ölçü Aralığı: DN15-DN250

Flange Ends / Flanş: EN 1092-1

Tests / Testler : EN 12266

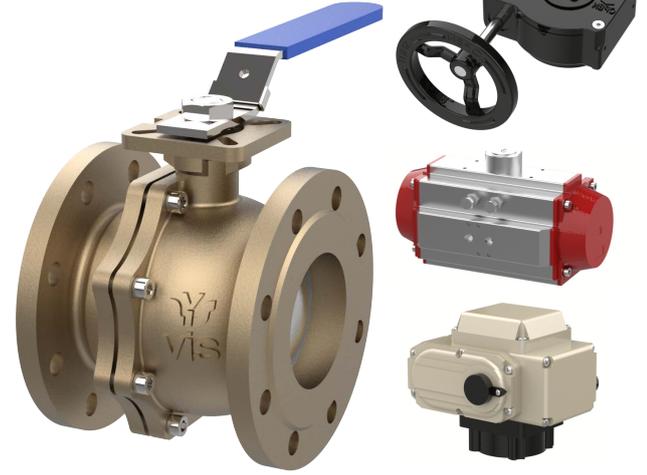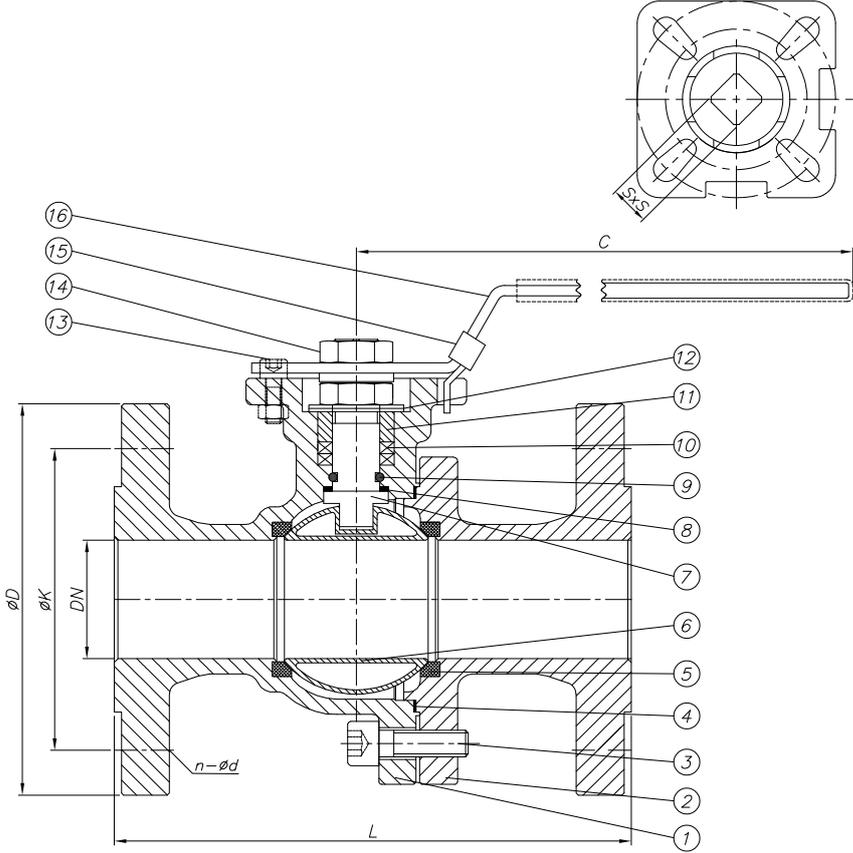

PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
Body	Gövde	Bronze Rg5 / CuSn10 / C95800	9	O-Ring	O-Ring	Viton
Bonnet	Kapak	Bronze Rg5 / CuSn10 / C95800	10	Packing	Salmastra	PTFE
Screw	Vida	SS 304 (A2)	11	Gland	Baskı	SS 304
Gasket	Conta	PTFE	12	Spring Washer	Yaylı Rondela	SS 304
Seat	Sit	PTFE	13	Screw / Nut	Vida / Somun	SS 304 (A2)
Ball	Küre	SS 316 / Bronze Rg5 / C95800	14	Nut	Somun	SS 304
Stem	Mil	SS 316 / Bronze	15	Lock	Kilit	SS 201
Thrust Gasket	Mil Contası	PTFE	16	Lever	Kol	SS 201 + PVC

Nominal Diameter / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	
FTF Dimensions / Boyutları DIN 3202-F4 / F5	L	115	120	125	130	140	150	170	180	190	325	350	400	450	
	C	130		170		195		245	275	295	530		625	-	
Top Flange / Üst Flanş	ISO 5211	F03 / F04		F04 / F05		F05 / F07		F07 / F10		F10 / F12		F12 / F14			
	PN16	SxS	9		11		14		17		22		27		
Torque / Tork	N.m	3	5	10	13	14	22	37	42	78	127	140	-	-	
Flange Dimensions / Flanş Boyutları EN 1092	PN 6	ØD	80	90	100	120	130	140	160	190	210	240	265	320	375
		ØK	55	65	75	90	100	110	130	150	170	200	225	280	335
		n - Ød	4-11			4-14			4-18			8-18		12-18	
	PN 10	ØD	95	105	115	140	150	165	185	200	220	250	285	340	395
		ØK	65	75	85	100	110	125	145	160	180	210	240	295	350
		n - Ød	4-14			4-18			8-18			8-22		12-22	
	PN 16	ØD	95	105	115	140	150	165	185	200	220	250	285	340	405
		ØK	65	75	85	100	110	125	145	160	180	210	240	295	355
		n - Ød	4-14			4-18			8-18			8-22		12-22	
Weight / Ağırlık	kg	2.7	3.4	4.3	6.0	7.0	9.2	13.0	15.9	19.0	35.9	47.0	77.6	174.3	

6

Ball Valves